



T-slots:

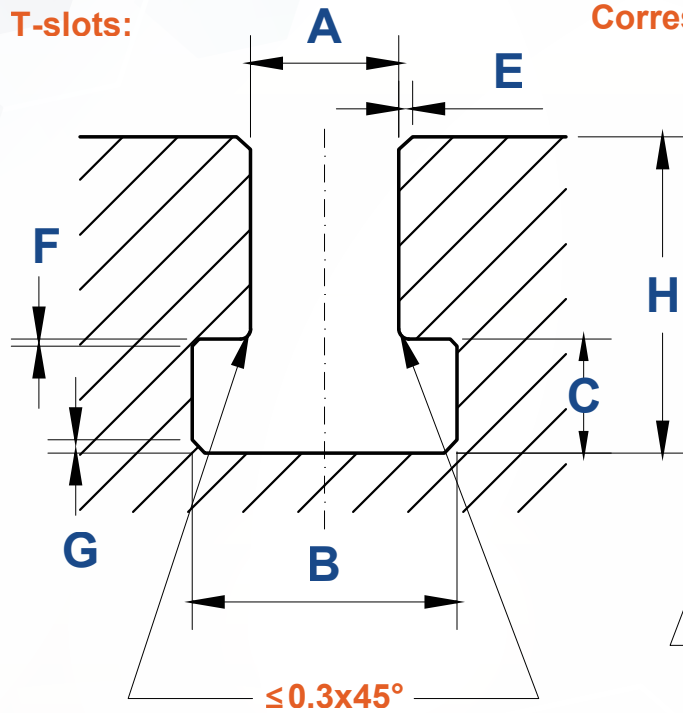

Correspond bolts:

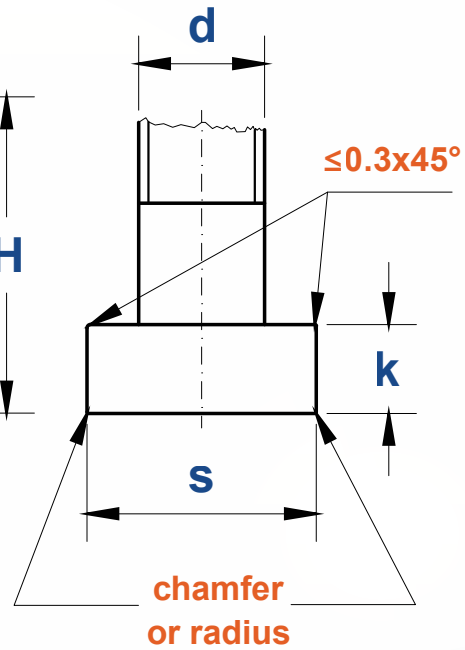

Size		5	6	8	10	12	14	18	22	28	36	42	48	54
A	Nominal Size	5	6	8	10	12	14	18	22	28	36	42	48	54
B	min	10	11	14.5	16	19	23	30	37	46	56	68	80	90
	max	11	12.5	16	18	21	25	32	40	50	60	72	85	95
C	min	3.5	5	7	7	8	9	12	16	20	25	32	36	40
	max	4.5	6	8	8	9	11	14	18	22	28	35	40	44
H	min	8	11	15	17	20	23	30	38	48	61	74	84	94
	max	10	13	18	21	25	28	36	45	56	71	85	95	106
E	max	1	1	1	1	1	1.6	1.6	1.6	1.6	2.5	2.5	2.5	2.5
F	max	0.6	0.6	0.6	0.6	0.6	0.6	1	1	1	1	1.6	2	2
G	max	1	1	1	1	1	1.6	1.6	2.5	2.5	2.5	4	6	6
d		M4	M5	M6	M8	M10	M12	M16	M20	M24	M30	M36	M42	M48
s		9	10	13	15	18	22	28	34	43	53	64	75	85
k		3	4	6	6	7	8	10	14	18	23	28	32	36

①. Slots: Tolerances on A: H12 for fixing slots, H8 for reference slots.

②. Bolt: Tolerances on d, s, k: usual tolerances for bolts and nuts.