


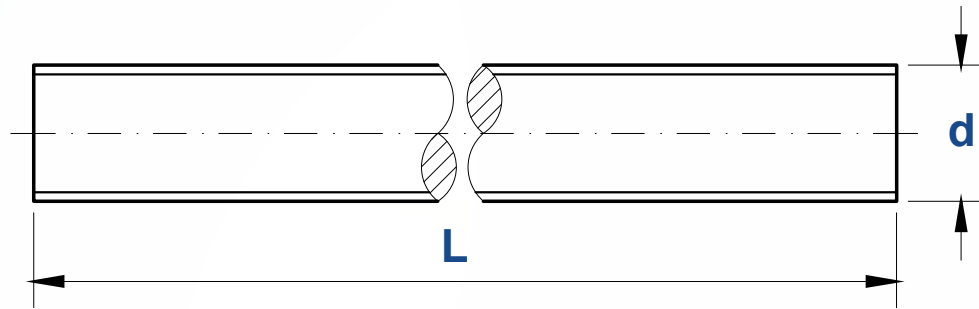

Thread Size d		M2	M2.5	M3	(M3.5)	M4	M5	M6	M8	M10	M12	(M14)	M16	M17
P	Coarse Thread Pitch	0.4	0.45	0.5	0.6	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5
	Fine Thread Pitch	/	/	/	/	/	/	/	1	1.25	1.25	1.5	1.5	1.5
	Fine Thread Pitch	/	/	/	/	/	/	/	/	1	1.5	/	/	/
L	±10	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
per 1000 units ≈ kg		18.7	30	44	60	78	124	177	319	500	725	970	1330	1650

Thread Size d		M20	(M22)	M24	(M27)	M30	(M33)	M36	(M39)	M42	(M45)	M48	(M52)
P	Coarse Thread Pitch	2.5	2.5	3	3	3.5	3.5	4	4	4.5	4.5	5	5
	Fine Thread Pitch	1.5	1.5	2	2	2	2	3	3	3	3	3	3
	Fine Thread Pitch	/	/	/	/	/	/	/	/	/	/	/	/
L	±10	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
per 1000 units ≈ kg		2080	2540	3000	3850	4750	5900	6900	8200	9400	11000	12400	14700

①. Material:

a) Steel, Property class: 4.6, 5.6, 5.8; Standard ISO 898-1

Note: Where no property class is specified, it shall be left to the discretion of the manufacturer

. b) Stainless steel, Property class: A2, A4; Standard DIN 267-11

c) Non-ferrous metal, Property class: CuZn=copper-zinc alloy, CU2 or CU3 at the discretion of the manufacturer. Standard DIN 267-18