


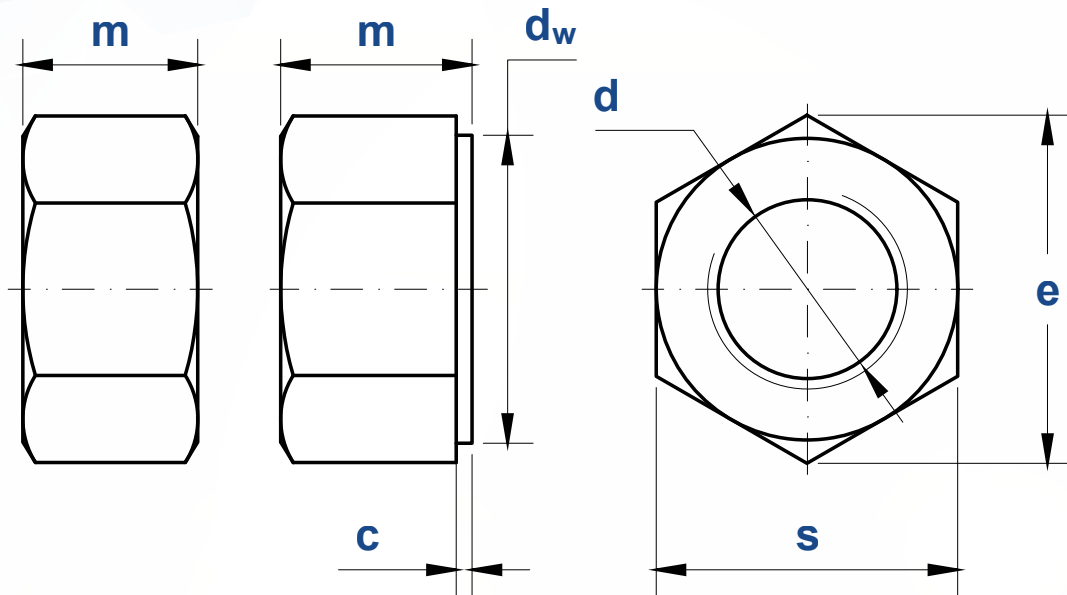

Thread Size d		M5	M6	M8	M10	(M10) ①	M12	M14	M16	M20	M24	M30	M36
P	Pitch	0.8	1	1.25	1.5	1.5	1.75	2	2	2.5	3	3.5	4
s	max	8.00	10.00	13.00	16.00	15.00	18.00	21.00	24.00	30.00	36.00	46.00	55.00
	min	7.78	9.78	12.73	15.73	14.73	17.73	20.67	23.67	29.16	35.00	45.00	53.80
e	max	9.24	11.55	15.01	18.48	17.32	20.78	24.25	27.71	34.64	41.57	53.12	63.51
	min	8.79	11.05	14.38	17.77	16.64	20.03	23.35	26.75	32.95	39.55	50.85	60.79
m	max	2.7	3.2	4	5	5	6	7	8	10	12	15	18
	min	2.45	2.9	3.7	4.7	4.7	5.7	6.42	7.42	9.1	10.9	13.9	16.9
c	max	/	/	/	/	/	/	/	/	0.8	0.8	0.8	0.8
	min	/	/	/	/	/	/	/	/	0.4	0.4	0.4	0.4
d _w	min	6.9	8.9	11.6	14.6	8	16.6	19.6	22.5	27.7	33.2	42.8	51.1

①, When M10 nuts are ordered, nuts with 16 mm width across flats shall be furnished, unless 15 mm width across flats is specified.