


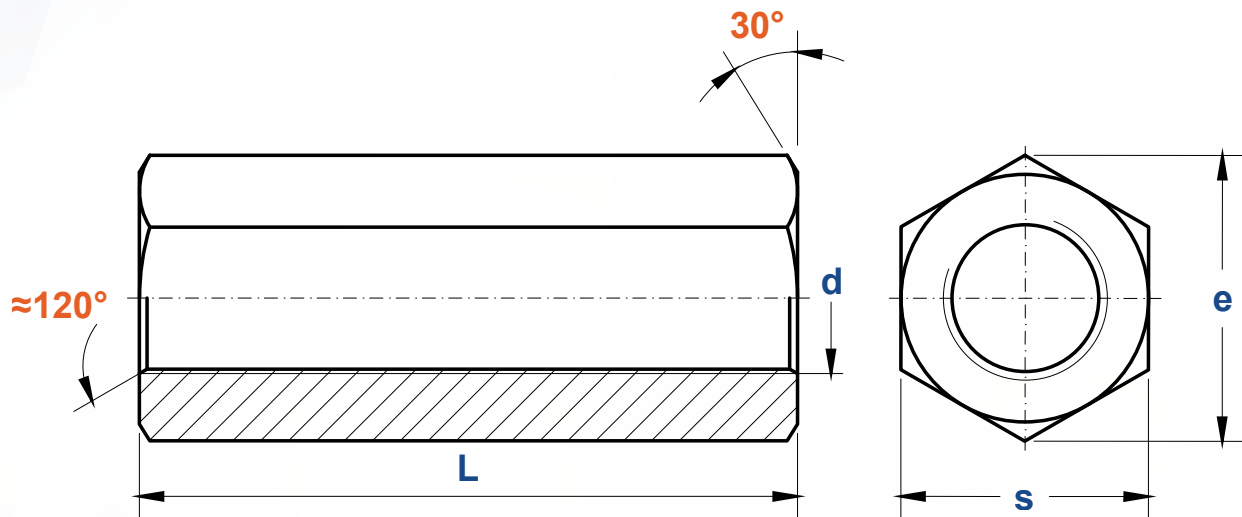

Screw Thread d	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30	M33	M36
P Pitch	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3	3	3.5	3.5	4
s	10	13	17	19	22	24	27	30	32	36	41	46	50	55
L	18	24	30	36	42	48	54	60	66	72	81	90	99	108
e	11.05	14.38	18.9	21.1	24.49	26.75	29.56	33.53	35.03	39.98	45.2	50.85	55.37	60.79
per 1000 units ≈ kg	7	18	42	63	95.5	122	140	240	300	412	608	825	1100	1470

①, Material:

a) Austenitic stainless steel, steel grade: A2 and A4; Strength class: ≤M39:50, ≤M20:70,80 ; 标准DIN EN ISO 3506

b) Property Strength class:50, Made From A1, A2 ; Characteristics: Soft; cold worked, turned and soft pressed fasteners

c) Property Strength class:70, Made From A2, A4 ; Characteristics: Cold worked, normal strength formed fasteners

d) Property Strength class:80, Made From A2, A4; Characteristics: Extreme cold worked, high strength, special applications