


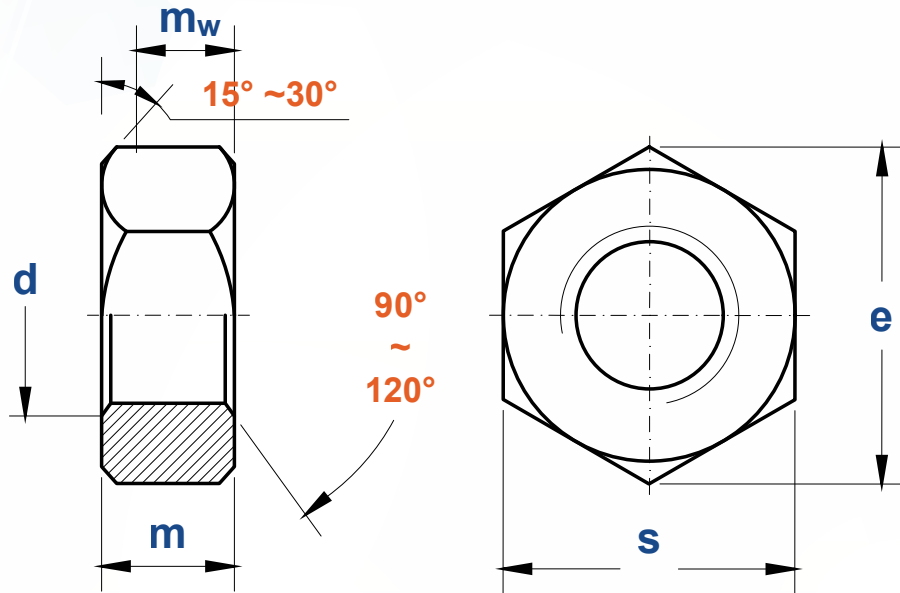

Thread Size d		M1.6	M2	M2.5	M3	(M3.5)	M4	M5	M6	M7	M8	M10	M12
P		0.35	0.4	0.45	0.5	0.6	0.7	0.8	1	1	1.25	1.5	1.75
m	max	1.3	1.6	2	2.4	2.8	3.2	4.7	5.2	6.5	6.8	8.4	10.8
	min	1.05	1.35	1.75	2.15	2.55	2.9	4.4	4.9	6.2	6.44	8.04	10.37
s	max	3.2	4	5	5.5	6	7	8	10	11	13	16	18
	min	3.02	3.82	4.82	5.32	5.82	6.78	7.78	9.78	10.73	12.73	15.73	17.73
e	min	3.41	4.32	5.45	6.01	6.58	7.66	8.79	11.05	12.12	14.38	17.77	20.03
m_w	min	0.84	1.08	1.4	1.72	2.04	2.32	3.52	3.92	4.96	5.15	6.43	8.3
per 1000 units≈kg		0.08	0.14	0.28	0.38	0.51	0.81	1.45	2.6	4.4	5.4	10.6	16.3

Thread Size d		(M14)	M16	M18	M20	M22	M24	M27	M30	M33	M36	M39
P		2	2	2.5	2.5	2.5	3	3	3.5	3.5	4	4
m	max	12.8	14.8	15.8	18	19.4	21.5	23.8	25.6	28.7	31	32
	min	12.1	14.1	15.1	16.9	18.1	20.2	22.5	24.3	27.4	29.4	30.4
s	max	21	24	27	30	34	36	41	46	50	55	60
	min	20.67	23.67	26.16	29.16	33	35	40	45	49	53.8	58.8
e	min	23.35	26.75	29.56	32.95	37.29	39.55	45.2	50.85	55.37	60.79	66.44
m_w	min	9.68	11.28	12.08	13.52	14.48	16.16	18	19.44	21.92	23.52	24.32
per 1000 units≈kg		26.4	38	52	73	104	125	178	238	320	420	520