


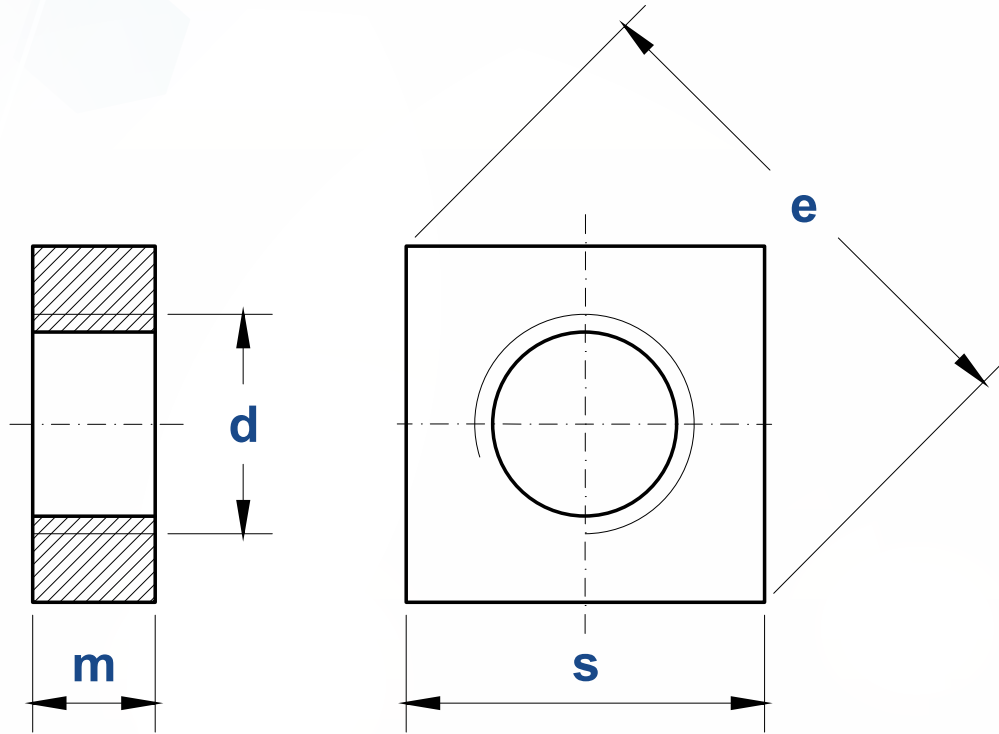

Thread Size d		M1.6	M2	M2.5	M3	(M3.5)	M4	M5	M6	M8	M10
P	Pitch	0.35	0.4	0.45	0.5	0.6	0.7	0.8	1	1.25	1.5
e	min	4	5	6.3	7	7.6	8.9	10.2	12.7	16.5	20.2
m	max=nominal size	1	1.2	1.6	1.8	2	2.2	2.7	3.2	4	5
	min	0.6	0.8	1.2	1.4	1.6	1.8	2.3	2.72	3.52	4.52
s	max=nominal size	3.2	4	5	5.5	6	7	8	10	13	16
	min	2.9	3.7	4.7	5.2	5.7	6.64	7.64	9.64	12.57	15.57
per 1000 units ≈ kg		0.08	0.13	0.27	0.35	0.44	0.64	1.06	1.93	4.01	7.6

①, Material:

a) Steel, hardness class (material): 11H Standard DIN 267-24;

b) Stainless steel, Steel grade (material): A2 Standard DIN EN ISO 3506-2;

c) Non-ferrous metal, Property class (material): CuZn=CU2 or CU3 at the choice of the manufacturer. Standard DIN EN 28839