
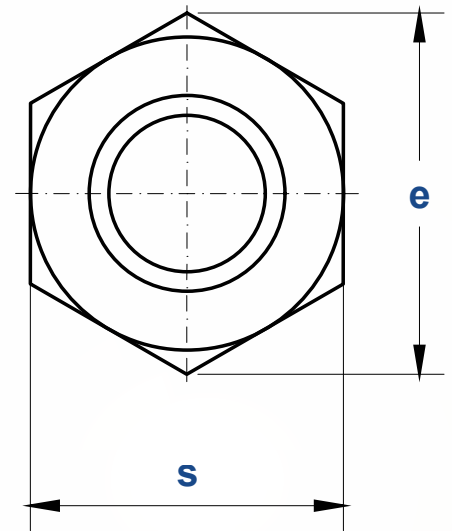


Prevailing
torque element,
Shape optional

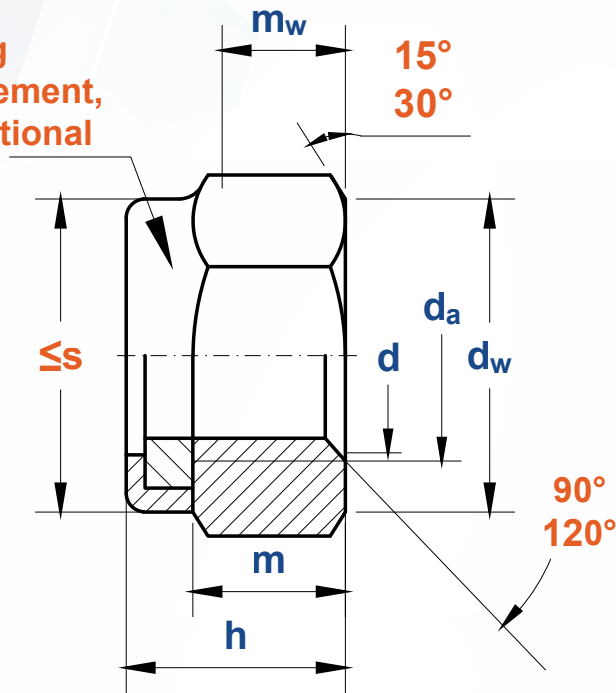

Thread Size d		M5	M6	M8	M10	M12	(M14)	M16	M20	M24	M30	M36
P	Pitch	0.8	1	1.25	1.5	1.75	2	2	2.5	3	3.5	4
d _a	max	5.75	6.75	8.75	10.8	13	15.1	17.3	21.6	25.9	32.4	38.9
	min	5	6	8	10	12	14	16	20	24	30	36
d _w	min	6.88	8.88	11.63	14.63	16.63	19.64	22.49	27.7	33.25	42.75	51.11
e	min	8.79	11.05	14.38	17.77	20.03	23.36	26.75	32.95	39.55	50.85	60.79
h	max	7.2	8.5	10.2	12.8	16.1	18.3	20.7	25.1	29.5	35.6	42.6
	min	6.62	7.92	9.5	12.1	15.4	17	19.4	23	27.4	33.1	40.1
m	min	4.8	5.4	7.14	8.94	11.57	13.4	15.7	19	22.6	27.3	33.1
m _w	min	3.84	4.32	5.71	7.15	9.26	10.7	12.6	15.2	18.1	21.8	26.5
s	max	8	10	13	16	18	21	24	30	36	46	55
	min	7.78	9.78	12.73	15.73	17.73	20.67	23.67	29.16	35	45	53.8