


Prevailing
torque element,
Shape optional.

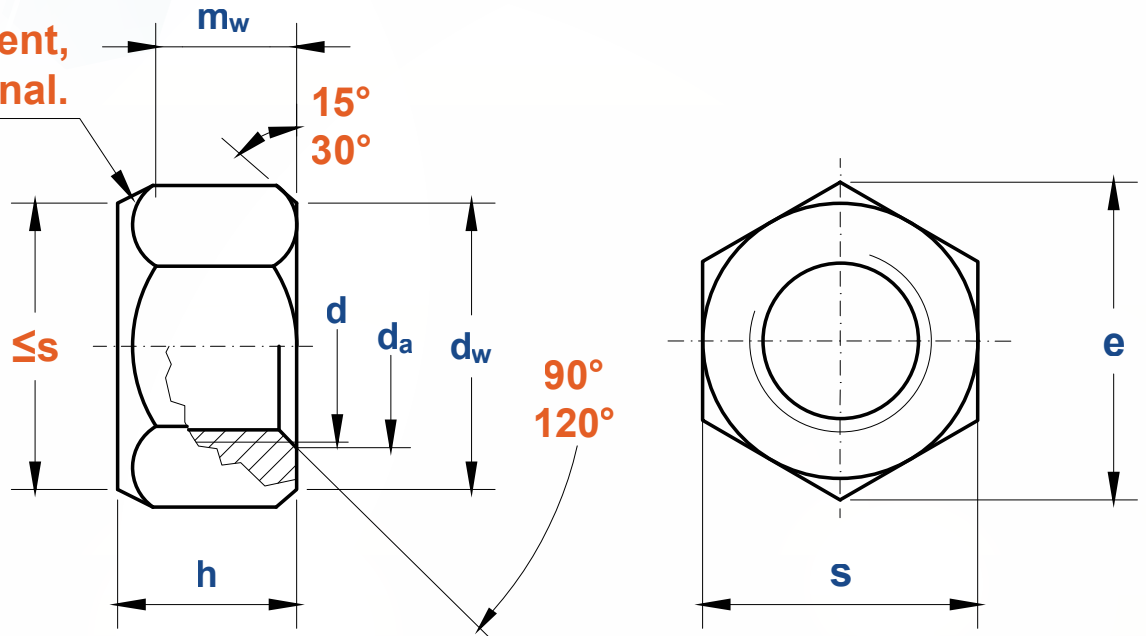

Thread Size d		M5	M6	M8	M10	M12	(M14)	M16	(M18)	M20	(M22)	M24	M30	M36
P	Pitch	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3	3.5	4
d_a	max	5.75	6.75	8.75	10.8	13	15.1	17.3	19.5	21.6	23.7	25.9	32.4	38.9
	min	5	6	8	10	12	14	16	18	20	22	24	30	36
d_w	min	6.88	8.88	11.63	14.63	16.63	19.64	22.49	24.9	27.7	31.4	33.25	42.75	51.11
e	min	8.79	11.05	14.38	17.77	20.03	23.36	26.75	29.56	32.95	37.29	39.55	50.85	60.79
h	max	5.3	5.9	7.1	9	11.6	13.2	15.2	17	19	21	23	26.9	32.5
	min	4.8	5.4	6.44	8.04	10.37	12.1	14.1	15.01	16.9	18.1	20.2	24.3	29.4
m_w	min	3.52	3.92	5.15	6.43	8.3	9.68	11.28	12.08	13.52	14.5	16.16	19.44	23.52
s	max	8	10	13	16	18	21	24	27	30	34	36	46	55
	min	7.78	9.78	12.73	15.73	17.73	20.67	23.67	26.16	29.16	33	35	45	53.8