


Prevailing torque element. shape optional

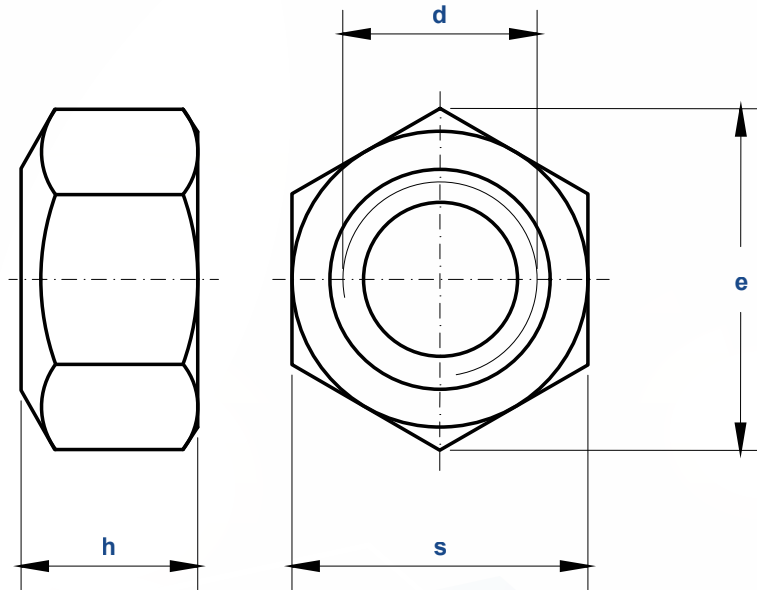

Screw Thread d		M3	M3.5	M4	M5	M6	M8	M10	(M10)	M12	M14	M16	M20	M24	M30	M36	
P	Pitch	0.50	0.60	0.70	0.80	1.00	1.25	1.50	1.50	1.75	2.00	2.00	2.50	3.00	3.50	4.00	
s	max	5.50	6.00	7.00	8.00	10.00	13.00	16.00	15.00	18.00	21.00	24.00	30.00	36.00	46.00	55.00	
	min	5.32	5.82	6.78	7.78	9.78	12.73	15.73	14.73	17.73	20.67	23.67	29.16	35.00	45.00	53.80	
e	max	6.35	6.93	8.08	9.24	11.55	15.01	18.48	17.32	20.78	24.25	27.71	34.64	41.57	53.12	63.51	
	min	6.01	6.58	7.66	8.79	11.05	14.38	17.77	16.64	20.03	23.35	26.75	32.95	39.55	50.85	60.79	
h	Class 5, 10	max	3.10	3.50	4.00	5.30	5.90	7.10	9.00	9.70	11.60	13.20	15.20	19.00	23.00	26.90	32.50
		min	2.65	3.00	3.50	4.80	5.40	6.44	8.04	8.70	10.37	12.10	14.10	16.90	20.20	24.30	29.40
	Class 9	max	3.10	3.50	4.00	5.30	6.70	8.00	10.50	11.20	13.30	15.40	17.90	21.80	26.40	31.80	38.50
		min	2.65	3.00	3.50	4.80	5.40	7.14	8.94	9.60	11.57	13.40	15.70	19.00	22.60	27.30	33.10