


Prevailing torque element. shape optional

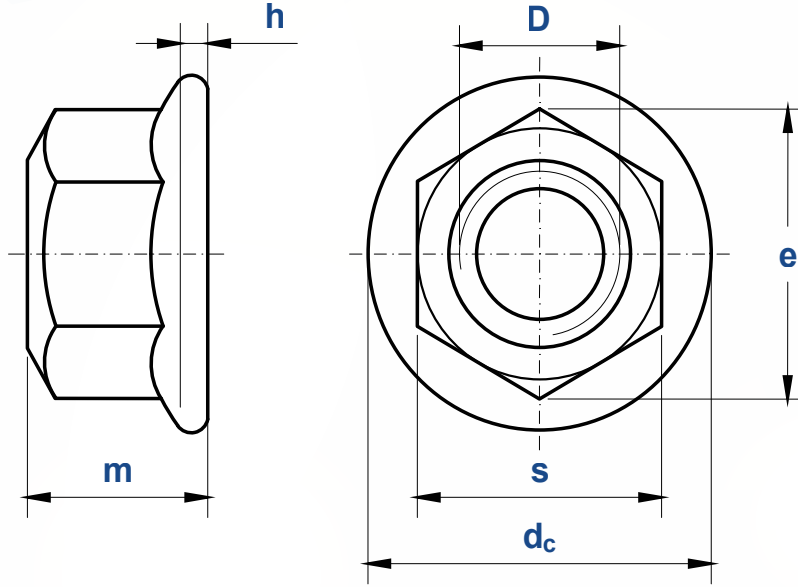

| Thread Size<br>D     |              | M6    | M8    | M10   | M12   | M14   | M16   | M20   |
|----------------------|--------------|-------|-------|-------|-------|-------|-------|-------|
| <b>P</b>             | Thread Pitch | 1     | 1.25  | 1.5   | 1.75  | 2     | 2     | 2.5   |
| <b>s</b>             | max          | 10.00 | 13.00 | 15.00 | 18.00 | 21.00 | 24.00 | 30.00 |
|                      | min          | 9.78  | 12.73 | 14.73 | 17.73 | 20.67 | 23.67 | 29.16 |
| <b>e</b>             | max          | 11.55 | 15.01 | 17.32 | 20.78 | 24.25 | 27.71 | 34.64 |
|                      | min          | 11.05 | 14.38 | 16.64 | 20.03 | 23.35 | 26.75 | 32.95 |
| <b>m</b>             | max          | 7.30  | 9.40  | 11.40 | 13.80 | 15.90 | 18.30 | 22.40 |
|                      | min          | 5.70  | 7.60  | 9.60  | 11.60 | 13.30 | 15.30 | 18.90 |
| <b>d<sub>c</sub></b> | max          | 14.20 | 17.90 | 21.80 | 26.00 | 29.90 | 34.50 | 42.80 |
| <b>h</b>             | min          | 1.10  | 1.20  | 1.50  | 1.80  | 2.10  | 2.40  | 3.00  |