


Prevailing torque element. shape optional

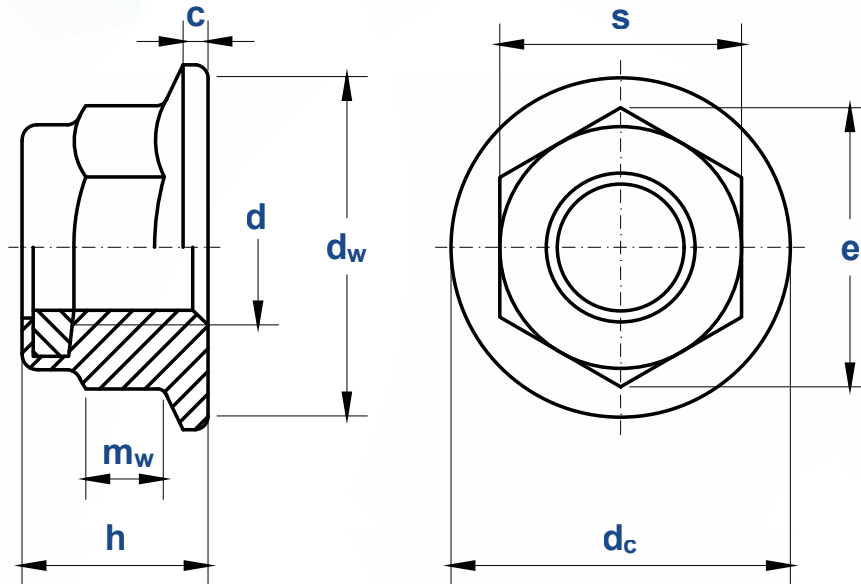

Nominal Diameter d		1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4
d		0.2500	0.3125	0.3750	0.4375	0.5000	0.5625	0.6250	0.7500
PP	UNC	20	18	16	14	13	12	11	10
	UNF	28	24	24	20	20	18	18	16
s	max	0.4385	0.5020	0.5645	0.6895	0.7520	0.8770	0.9395	1.1270
	min	0.4280	0.4890	0.5510	0.6750	0.7360	0.8610	0.9220	1.0880
e	max	0.505	0.577	0.650	0.794	0.866	1.010	1.083	1.299
	min	0.488	0.557	0.628	0.768	0.840	0.982	1.051	1.240
h	max	0.300	0.365	0.425	0.495	0.555	0.625	0.690	0.825
m_w	min	0.140	0.170	0.200	0.230	0.260	0.290	0.320	0.380
c	min	0.040	0.050	0.060	0.070	0.080	0.090	0.100	0.110
d_c	max	0.560	0.680	0.810	0.930	1.070	1.190	1.330	1.585
d_w	min	0.484	0.602	0.730	0.846	0.982	1.101	1.230	1.472