


Prevailing
torque element,
Shape optional.

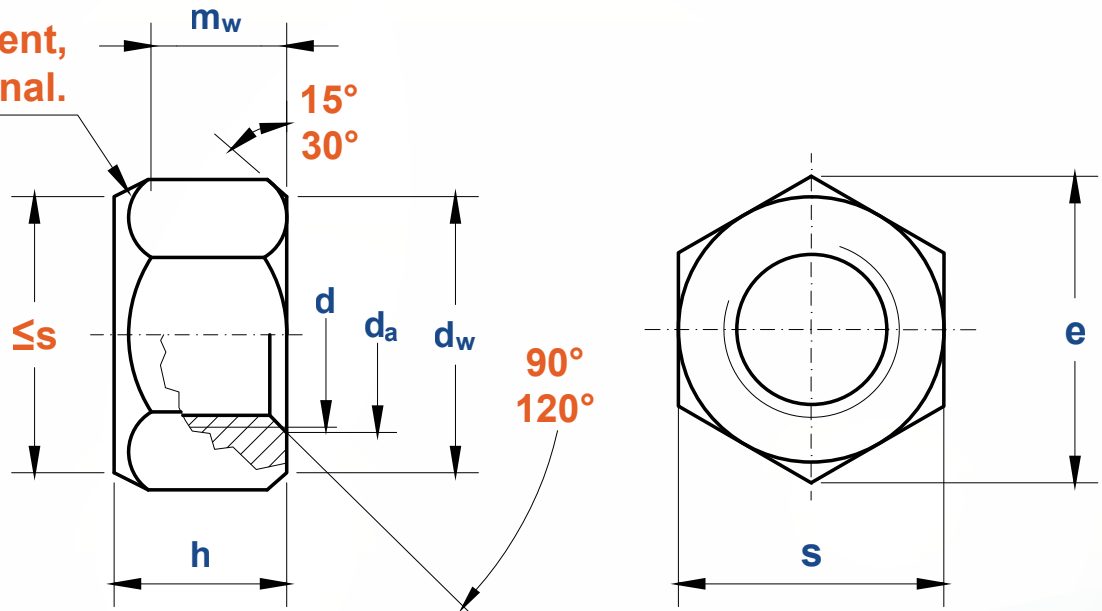

Screw Thread d		M5	M6	M8	M10	M12	(M14)	M16	M20	M24	M30	M36
P	Pitch	0.8	1	1.25	1.5	1.75	2	2	2.5	3	3.5	4
d _a	max	5.75	6.75	8.75	10.8	13	15.1	17.3	21.6	25.9	32.4	38.9
	min	5.00	6.00	8.00	10.00	12.00	14.00	16.00	20.00	24.00	30.00	36.00
d _w	min	6.88	8.88	11.63	14.63	16.63	19.64	22.49	27.7	33.25	42.75	51.11
e	min	8.79	11.05	14.38	17.77	20.03	23.36	26.75	32.95	39.55	50.85	60.79
h	max	5.1	6	8	10	13.3	14.1	16.4	20.3	23.9	30	36
	min	4.8	5.4	7.14	8.94	11.57	13.4	15.7	19	22.6	27.3	33.1
m _w	min	3.52	3.92	5.15	6.43	8.30	9.68	11.28	13.52	16.16	19.44	23.52
s	max	8	10	13	16	18	21	24	30	36	46	55
	min	7.78	9.78	12.73	15.73	17.73	20.67	23.67	29.16	35	45	53.8

①, Material:

Steel, Strength class (material): 5,8,10,12。 Standard ISO 898-2, ISO 2320