


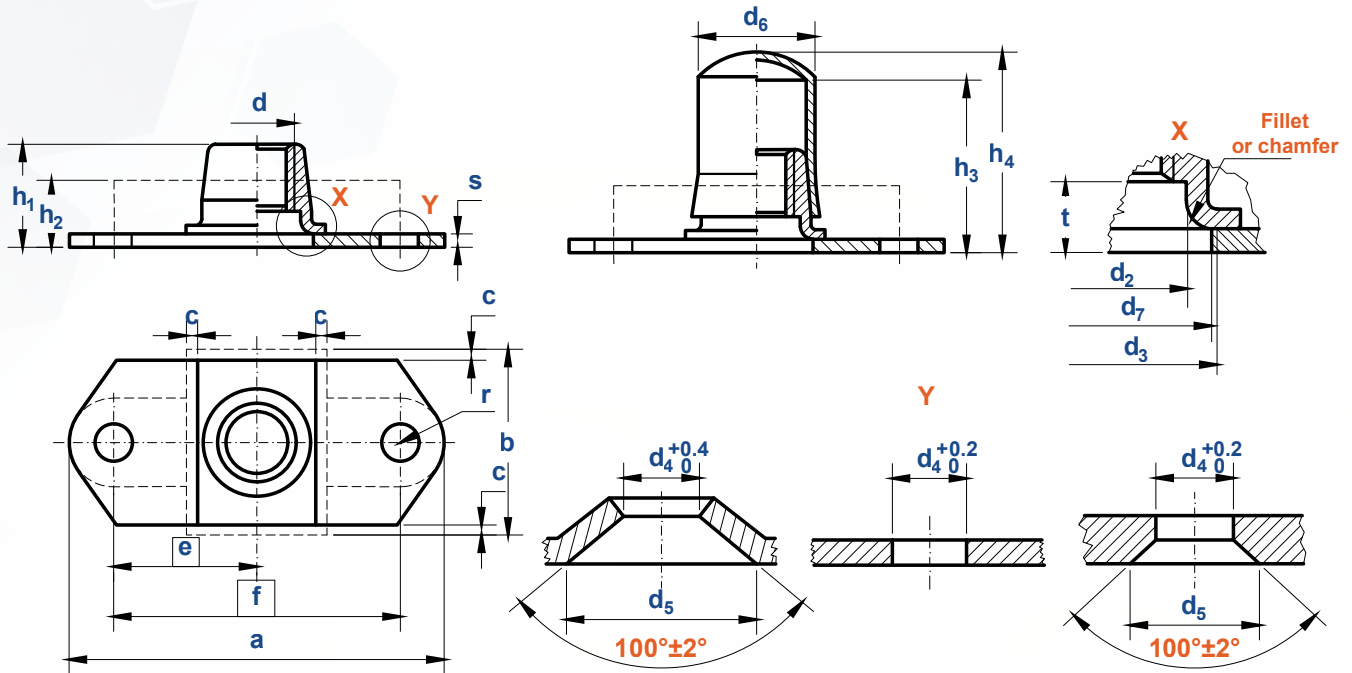

Thread Size d		MJ3 ×0.5-4H6H	MJ4 ×0.7-4H6H	MJ5 ×0.8-4H6H	MJ6 ×1-4H5H	MJ8 ×1-4H5H	MJ10 ×1.25-4H5H
Code		03	04	05	06	08	10
a	max	23.2	23.2	25.2	29.2	29.2	35.2
b	max	11	11	11	13.5	16	18
dw	without cap	0.5	0.5	0.7	0.7	0.75	0.75
	with cap	/	0.45	0.45	0.45	0.45	/
d2	min	/	4.4	5.5	6.5	8.5	10.5
d3	max	5.2	6.2	7.3	8.7	10.9	12.9
d4		2.5	2.5	2.5	2.5	3	3.5
d5	±0.25	4.8	4.8	4.8	4.8	5.7	6.6
d6	max	/	6.6	7.9	9.2	12.8	/
d7	min	4.5	5.5	6.6	7.5	9.5	11.5
e		8.5	8.5	9.5	11	11	13
f		17	17	19	22	22	26
h1		4	5.8	6.9	8.1	9.9	12
h2		4.5	4.5	4.5	4.6	5.5	6
h3		/	11	11.4	12.7	15	/
h4		/	13	13.4	14.7	18	/
r		3	3	3	3.5	3.5	4.5
s		0.8	0.8	0.8	0.8	1	1
t		/	2.2	2.4	2.7	2.7	3
y		0.15	0.15	0.15	0.18	0.2	0.23
per 1000 units≈kg	without cap	1.7	2.01	2.31	3.82	7.35	10.06
	with cap	/	2.57	2.97	4.68	9.21	/