


Prevailing
torque element,
Shape optional.

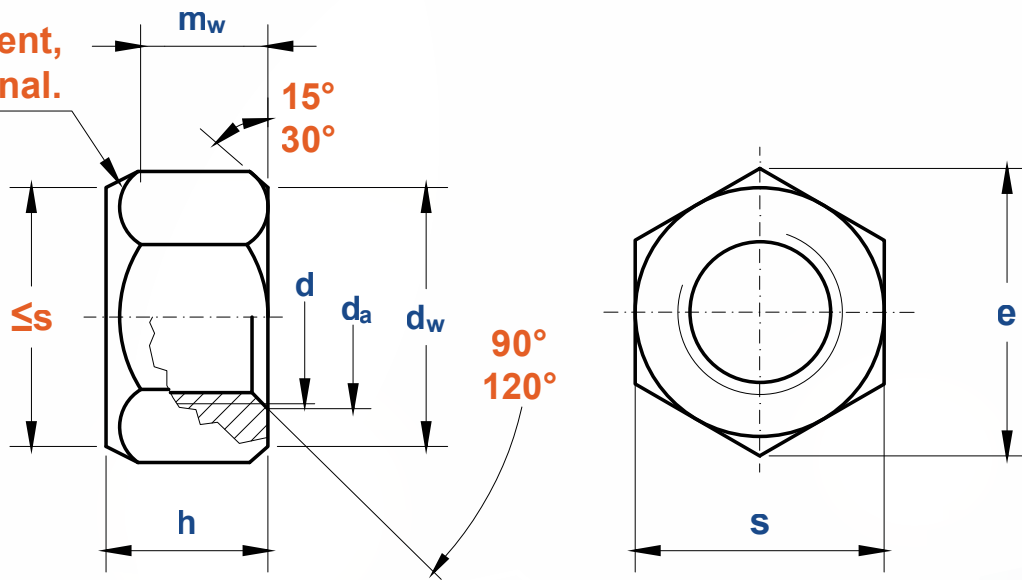

Thread Size d			M8	M10	M12	(M14)	M16	(M18)	M20	(M22)	M24	(M27)	M30	(M33)	M36	(M39)
P	Pitch	Fine thread, 1	1	1.25	1.5	1.5	1.5	2	2	2	2	2	2	2	3	3
		Fine thread, 2	/	1	1.25	/	/	1.5	1.5	1.5	/	/	/	/	/	/
d_a	max		8.75	10.8	12.96	15.12	17.28	19.44	21.6	23.76	25.92	29.16	32.4	35.64	38.88	42.12
	min		8	10	12	14	16	18	20	22	24	27	30	33	36	39
d_w	min		11.63	14.63	16.63	19.64	22.49	24.85	27.7	31.35	33.25	38	42.75	46.55	51.11	55.86
e	min		14.38	17.77	20.03	23.36	26.75	29.56	32.95	37.29	39.55	45.2	50.85	55.37	60.79	66.44
h	max		8	10	12.3	14.1	16.4	18	20.3	22	24	27	30	33	36	39
	min		7.14	8.94	11.57	13.4	15.7	16.9	19	20.5	22.6	25.4	27.3	30.9	33.1	35.9
m_w	min		5.15	6.43	8.3	9.68	11.28	12.08	13.52	14.48	16.16	18	19.44	21.92	23.52	25.44
s	max		13	16	18	21	24	27	30	34	36	41	46	50	55	60
	min		12.73	15.73	17.73	20.67	23.67	26.16	29.16	33	35	40	45	49	53.8	58.8