


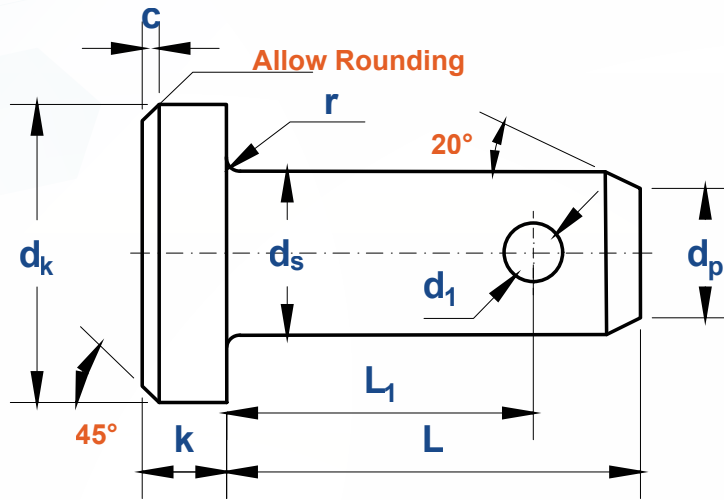

Nominal Diameter		3/16	1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4	7/8
ds	max	0.186	0.248	0.311	0.373	0.436	0.496	0.558	0.621	0.746	0.871
	min	0.181	0.243	0.306	0.368	0.431	0.491	0.553	0.616	0.741	0.866
dk	max	0.32	0.38	0.44	0.51	0.57	0.63	0.82	0.82	0.94	1.04
	min	0.3	0.36	0.42	0.49	0.55	0.61	0.8	0.8	0.92	1.02
k	max	0.07	0.1	0.1	0.13	0.16	0.16	0.21	0.21	0.26	0.32
	min	0.05	0.08	0.08	0.11	0.14	0.14	0.19	0.19	0.24	0.3
c	tol. (± 0.01)	0.02	0.03	0.03	0.03	0.04	0.04	0.06	0.06	0.07	0.09
dp	max	0.15	0.21	0.26	0.33	0.39	0.44	0.5	0.56	0.68	0.8
	min	0.14	0.2	0.25	0.32	0.38	0.43	0.49	0.55	0.67	0.79
L1	tol. (+3/64, 0)	L - 9/64	L - 9/64	L - 7/32	L - 7/32	L - 7/32	L - 7/32	L - 7/32	L - 7/32	L - 7/32	L - 5/16
d1		3/32	3/32	5/32	5/32	5/32	5/32	5/32	5/32	5/32	7/32

Nominal Diameter		1	1-1/8	1-1/4	1-3/8	1-1/2	1-5/8	1-3/4	1-7/8	2
ds	max	0.996	1.13	1.25	1.375	1.5	1.625	1.75	1.875	2
	min	0.991	1.15	1.26	1.355	1.48	1.605	1.73	1.855	1.98
dk	max	1.19	1.33	1.5	1.77	2.02	2.2	2.14	2.27	2.4
	min	1.17	1.36	1.47	1.73	1.98	2.16	2.1	2.23	2.36
k	max	0.35	0.42	0.42	0.53	0.59	0.59	0.59	0.59	0.59
	min	0.33	0.33	0.33	0.44	0.5	0.5	0.5	0.5	0.5
c	tol. (± 0.01)	0.1	0.12	0.12	0.15	0.18	0.18	0.18	0.18	0.18
dp	max	0.93	1.01	1.12	1.23	1.35	1.46	1.57	1.68	1.8
	min	0.92	1	1.11	1.22	1.34	1.45	1.56	1.67	1.79
L1	tol. (+3/64, 0)	L - 5/16	L - 5/8	L - 5/8	L - 5/8	L - 5/8	L - 5/8	L - 5/8	L - 5/8	L - 5/8
d1		7/32	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4

①. Unless otherwise specified by the purchaser, clevis pins shall be made of either low or medium-carbon steel.