


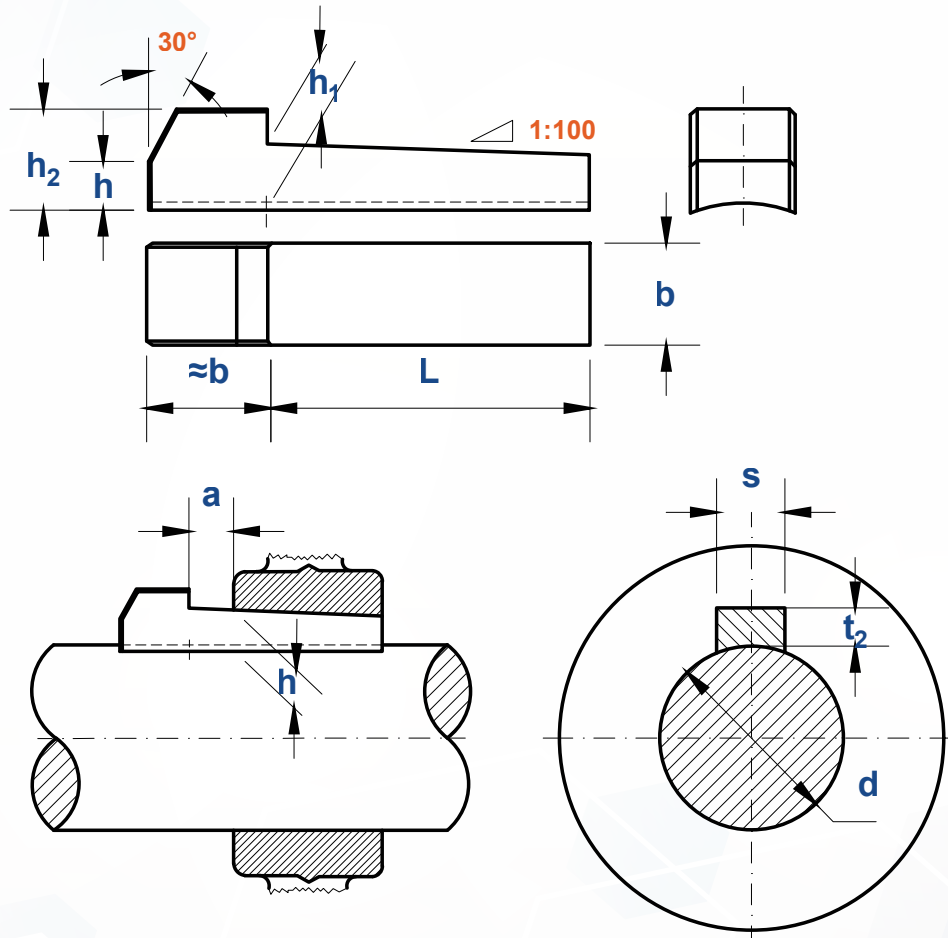

Size		8 ×3.5	10 ×4	12 ×4	14 ×4.5	16 ×5	18 ×5	20 ×6	22 ×7	25 ×7	28 ×7.5	32 ×8.5	36 ×9	
b	max=nominal size (h9)	8	10	12	14	16	18	20	22	25	28	32	36	
	min	7.964	9.964	11.957	13.957	15.957	17.957	19.948	21.948	24.948	27.948	31.938	35.938	
h		3.5	4	4	4.5	5	5	6	7	7	7.5	8.5	9	
h ₁	max=nominal size	3.7	4.2	4.2	4.7	5.2	5.2	6.2	7.2	7.2	7.7	8.8	9.4	
	min	3.5	4	4	4.5	5	5	6	7	7	7.5	8.6	9.1	
h ₂		7.5	8	8	9	11	11	14	15	18	20	22	25	
s	Nominal Size (D10)		8	10	12	14	16	18	20	22	25	28	32	36
	max		8.098	10.098	12.12	14.12	16.12	18.12	20.149	22.149	25.149	28.149	32.18	36.18
	min		8.04	10.04	12.05	14.05	16.05	18.05	20.065	22.065	25.065	28.065	32.08	36.08
a	≈		5	6	6	6	7	7	8	9	9	10	11	12
t ₂	groove depth	min=nominal size	3.2	3.7	3.7	4	4.5	4.5	5.5	6.5	6.4	6.9	7.9	8.4
		max	3.4	3.9	3.9	4.2	4.7	4.7	5.7	6.7	6.6	7.1	8.1	8.6
d	for shaft diameter		22~30	30~38	38~44	44~50	50~58	58~65	65~75	75~85	85~95	95~110	110~130	130~150

①. Material: St 60 (steel of at least 60 kg / mm² tensile strength in finished condition), specify other materials when ordering.