


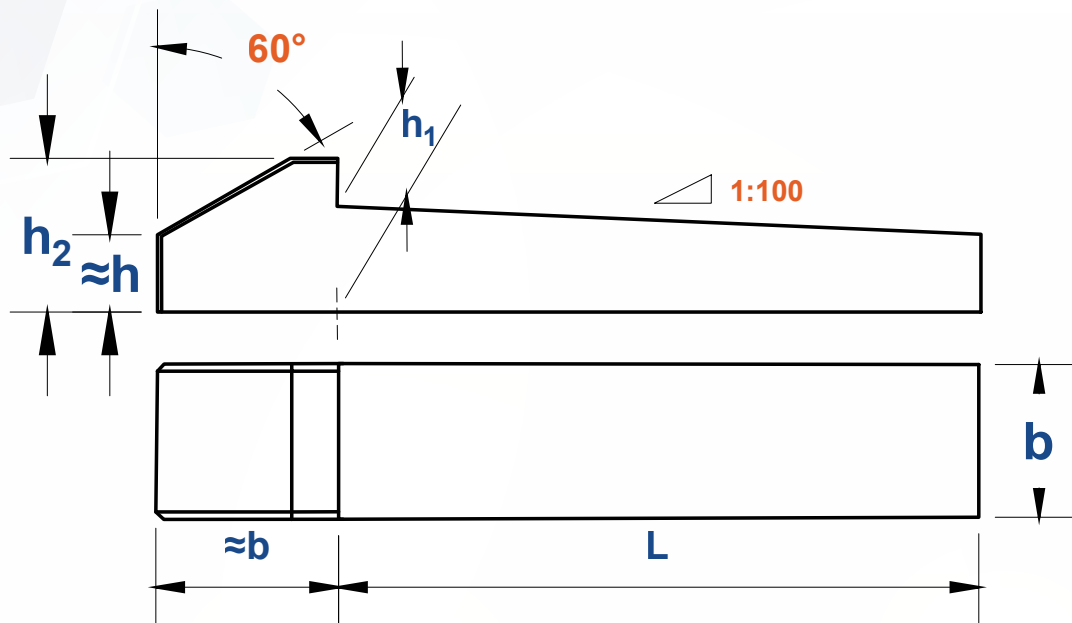

Normal size b		4	5	6	8	10	12	14	16	18	20	22	25
b	min	3.97	4.97	5.97	7.964	9.964	11.957	13.957	15.957	17.957	19.948	21.948	24.948
h	nominal size	4	5	6	7	8	8	9	10	11	12	14	14
d	shaft diameter	max	12	17	22	30	38	44	50	58	65	75	85
		min	10	12	17	22	30	38	44	50	58	65	75
h ₁	max=nominal size		4.1	5.1	6.1	7.2	8.2	8.2	9.2	10.2	11.2	12.2	14.2
	min		4	5	6	7	8	8	9	10	11	12	14
h ₂		7	8	10	11	12	12	14	16	18	20	22	22

Normal size b		28	32	36	40	45	50	56	63	70	80	90	100
b	min	27.948	31.938	35.938	39.938	44.938	49.938	55.926	62.926	69.926	79.926	89.913	99.913
h	nominal size	16	18	20	22	25	28	32	32	36	40	45	50
d	shaft diameter	max	110	130	150	170	200	230	260	290	330	380	440
		min	95	110	130	150	170	200	230	260	290	330	380
h ₁	max=nominal size		16.2	18.3	20.4	22.4	25.4	28.4	32.5	32.5	36.5	40.5	45.6
	min		16	18.1	20.1	22.1	25.1	28.1	32.2	32.2	36.2	40.2	45.3
h ₂		25	28	32	36	40	45	50	50	56	63	70	80

①, Material: St 60-1

Usable Semi-Finished Products: Key Steel to DIN 6880; Grade C45K by DIN 1652

Other materials, such as stainless steel, according to the agreement.