



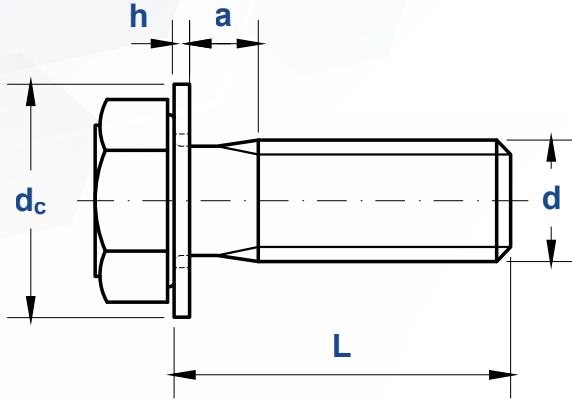

Screw threaded up to the washer

Bolts / Screws			According to drawing (ISO 10673)		
Type	Reference Standard	Code	Type S	Type N	Type L
Hexagon head fully threaded screw	ISO 4017	S1		✓	✓
Hexagon head bolt	ISO 4014	S2		✓	✓
Cross-recessed pan head screw	ISO 7045	S3		✓	✓
Internal hexagon cylinder head screw (Allen)	ISO 4762	S4	✓	✓	✓
Slotted pan head screw	ISO 1580	S5		✓	✓
Slotted cylindrical head screw	ISO 1207	S6	✓	✓	✓

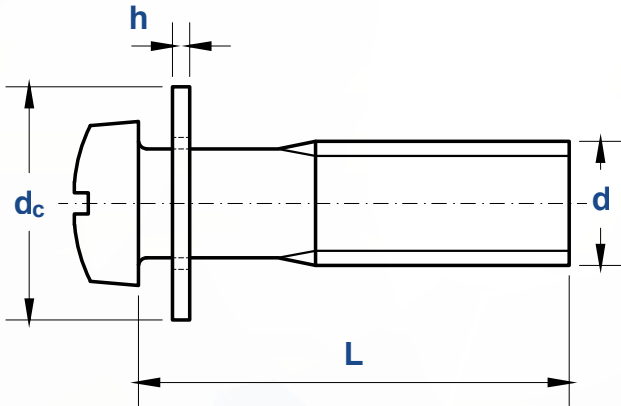

Screw with shank

For thread diameter			M2	M2.5	M3	(M3.5)	M4	M5	M6	M8	M10	M12
h	Type S	Nominal Size	0.6	0.6	0.6	0.8	0.8	1	1.6	1.6	2	2
d _c	Type S	max	4.5	5	6	7	8	9	11	15	18	20
h	Type N	Nominal Size	0.6	0.6	0.6	0.8	0.8	1	1.6	1.6	2	2.5
d _c	Type N	max	5	6	7	8	9	10	12	16	20	24
h	Type L	Nominal Size	0.6	0.6	0.8	0.8	1	1	1.6	2	2.5	3
d _c	Type L	max	6	8	9	11	12	15	18	24	30	37