



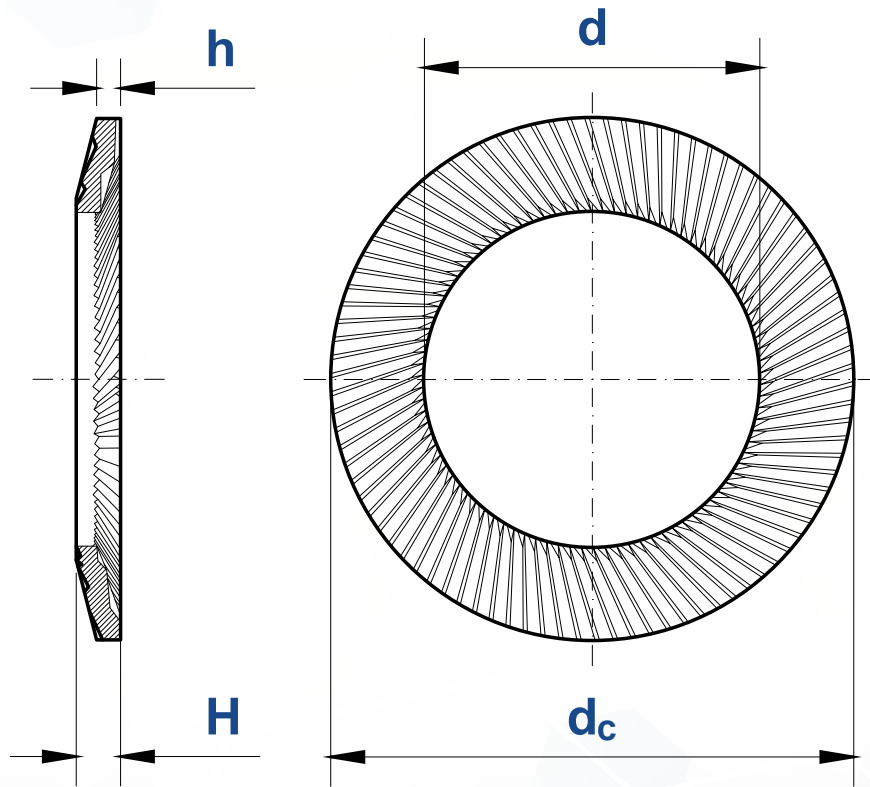

Size	1.6	2	2.5	3	3.5	4	5	6	6.35	7	8	10	11.1
Size(inch)	-	-	-	1/8	-	5/32	3/16	-	1/4	-	5/16	3/8	7/16
d	1.7	2.2	2.7	3.2	3.7	4.3	5.3	6.4	6.7	7.4	8.4	10.5	11.6
d _c	3.2	4	4.8	5.5	6	7	9	10	9.5	12	13	16	15.9
h	0.35	0.35	0.45	0.45	0.5	0.5	0.6	0.6	0.6	0.7	0.7	0.9	0.9
H	max	0.6	0.6	0.9	0.9	0.9	1	1.1	1.2	1.2	1.3	1.4	1.6
	min	0.4	0.4	0.5	0.5	0.55	0.55	0.6	0.7	0.65	0.8	0.9	1.1
per 1000 units ≈ kg		0.013	0.021	0.039	0.049	0.055	0.085	0.167	0.2	0.15	0.355	0.392	0.75

①, Material: Spring steel scuh as C60S according to DIN EN 10132-4

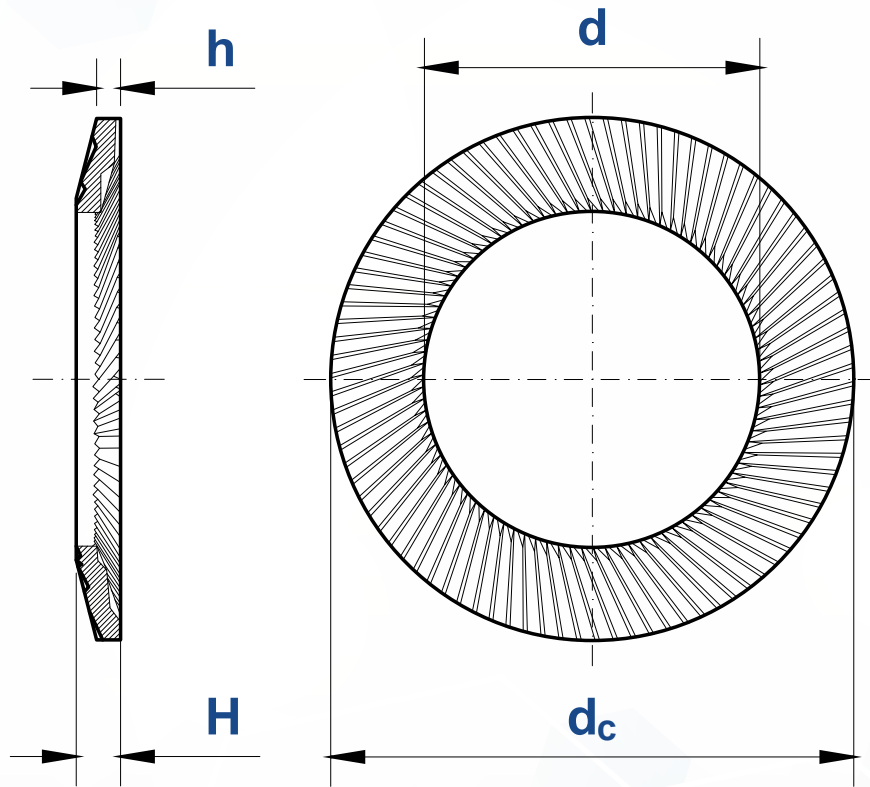

Size	12	12.7	14	16	18	19	20	22	24	25.4	27	30	36
Size(inch)	-	1/2	-	5/8	-	3/4	-	7/8	-	1	-	1-1/8	1-3/8
d	13	13.7	15	17	19	20	21	23	25.6	27	28.6	31.6	38
d _c	18	19	22	24	27	30	30	33	36	38	39	45	54
h	1	1	1.1	1.2	1.4	1.4	1.4	1.4	1.6	1.8	1.8	1.8	2.5
H	max	1.7	1.8	2	2.1	2.3	2.5	2.5	2.7	2.9	3.1	3.1	4.2
	min	1.15	1.25	1.35	1.55	1.75	1.9	1.85	1.95	2.15	2.35	2.35	3.2
per 1000 units ≈ kg	0.879	0.976	1.641	1.984	2.97	4.1	3.742	4.507	5.91	7.449	7.369	10.78	21.28

①, Material: Spring steel scuh as C60S according to DIN EN 10132-4