



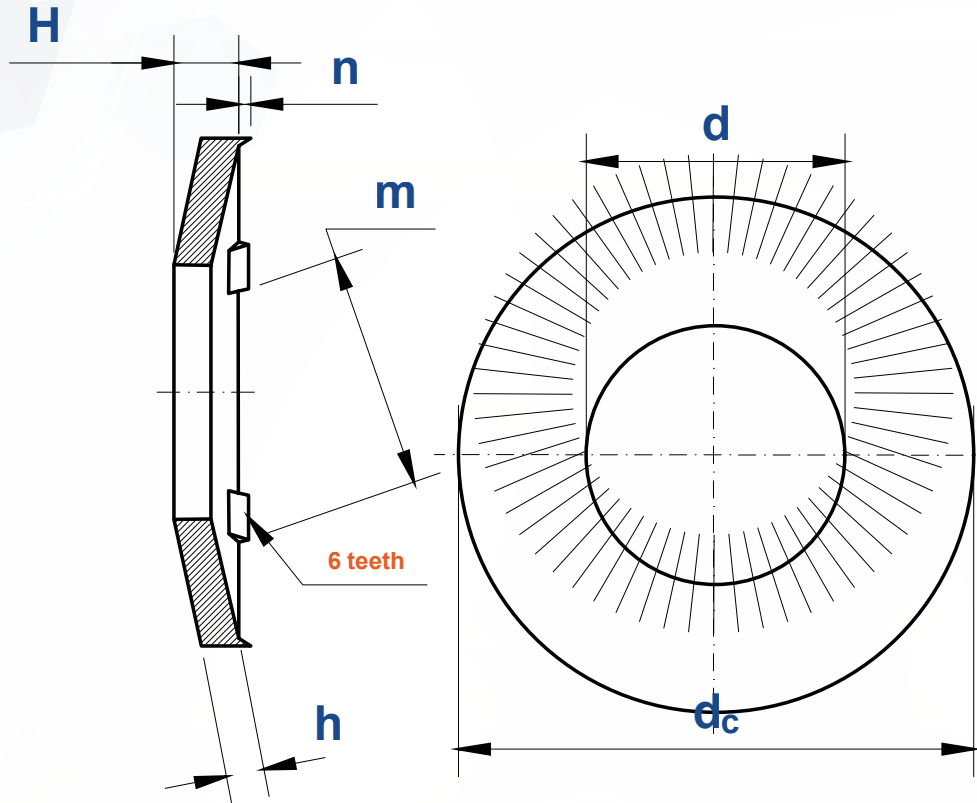

For Nominal Thread Diameter		M3	M3.5	M4	M5	M6 -001	M6 -002	M8 -001	M8 -002
d	min	3.1	3.6	4.1	5.1	6.1	6.1	8.2	8.2
	max	3.4	3.9	4.4	5.4	6.4	6.4	8.5	8.5
d _c	min	5.8	6.8	7.8	9.8	11.8	11.8	15.8	15.8
	max	6.2	7.2	8.2	10.2	12.2	12.2	16.2	16.2
H	min	0.8	0.95	1	1.25	1.5	1.5	1.95	2.15
	max	0.95	1.1	1.15	1.5	1.8	1.8	2.4	2.4
h	min	0.57	0.67	0.77	0.97	1.16	1.16	1.36	1.36
	max	0.63	0.73	0.83	1.03	1.24	1.24	1.44	1.44
m	min	0.7	0.9	1.1	1.9	2	2	2	2
	max	0.9	1.1	1.3	2.1	2.2	2.2	2.2	2.2
n	min	0.2	0.2	0.2	0.3	0.3	0.9	0.3	0.9
	max	0.4	0.4	0.4	0.7	0.7	1.3	0.7	1.3
per 1000 units ≈ kg		0.083	0.138	0.209	0.426	0.76	0.76	1.55	1.55

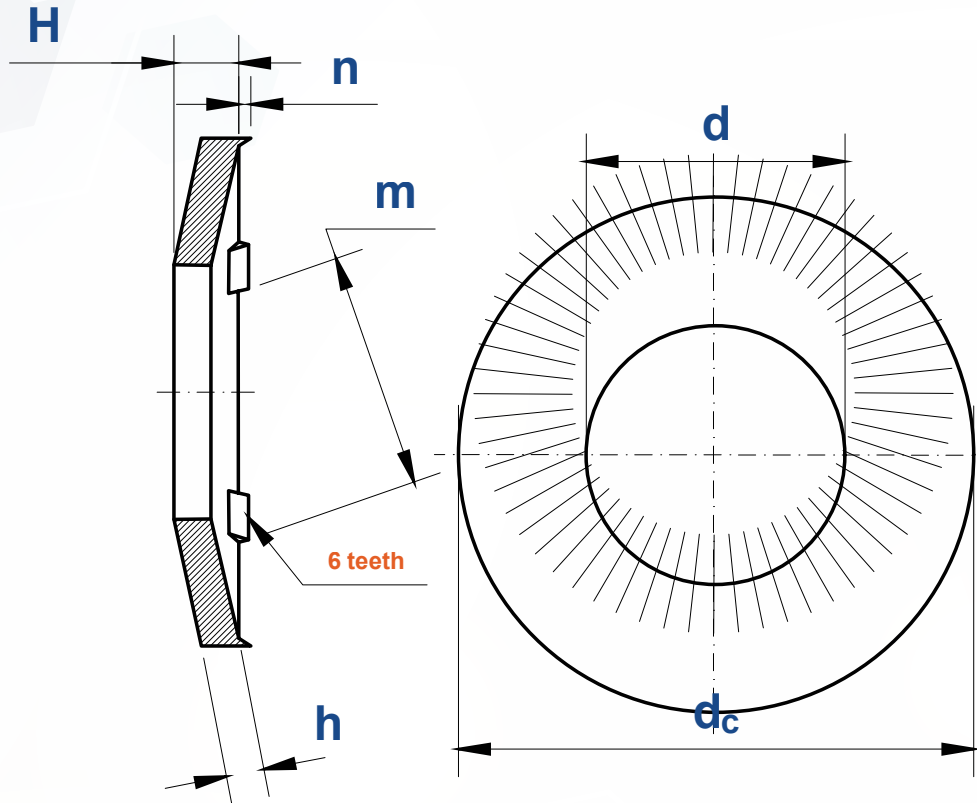

For Nominal Thread Diameter		M10 -001	M10 -002	M12 -001	M12 -002	M16 -001	M16 -002	M20 -001	M20 -002
d	min	10.2	10.2	12.4	12.4	16.4	16.4	20.5	20.5
	max	10.6	10.6	12.8	12.8	16.8	16.8	21	21
d _c	min	19.75	19.75	23.75	23.75	31.7	31.7	39.7	39.7
	max	20.25	20.25	24.25	24.25	32.3	32.3	40.3	40.3
H	min	2.15	2.15	2.15	2.15	3.5	3.5	4.2	4.2
	max	2.6	2.6	2.6	2.6	3.95	3.95	4.65	4.65
h	min	1.56	1.56	1.56	1.56	2.42	2.42	2.92	2.92
	max	1.64	1.64	1.64	1.64	2.58	2.58	3.08	3.08
m	min	2	2	2	2	4.5	4.5	4.5	4.5
	max	2.2	2.2	2.2	2.2	4.7	5.5	4.7	5.5
n	min	0.3	0.9	0.3	0.9	0.3	0.9	0.4	1
	max	0.7	1.3	0.7	1.3	0.7	1.3	0.8	1.4
per 1000 units ≈ kg		2.78	2.78	3.97	3.97	11.2	11.2	20.8	20.8