


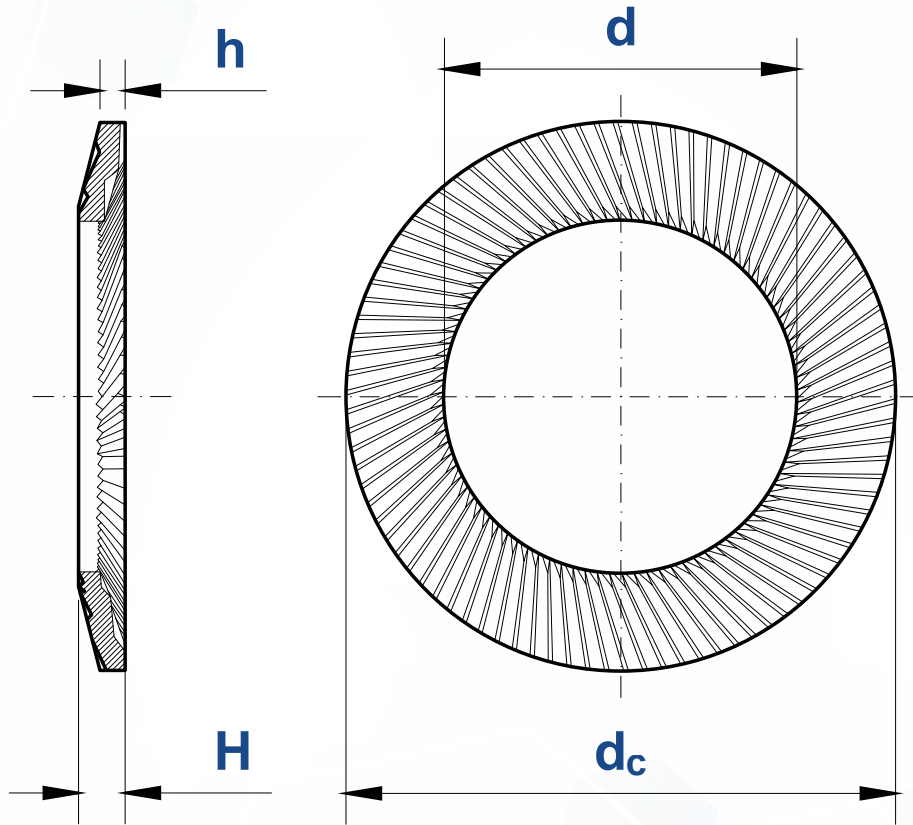

Size	5	6	8	10	12	14	16	18	20	22	24	27	30
Size(inch)	3/16	-	5/16	3/8	-	-	5/8	-	-	7/8	-	-	1-1/8
d	5.3	6.4	8.4	10.5	13	15	17	19	21	23	25.6	28.6	31.6
dc	9	10	13	16	18	22	24	27	30	33	36	39	45
h	1	1	1.2	1.5	1.5	1.5	2	2	2	2	2.5	2.5	2.5
H	max	1.30	1.40	1.70	2.01	2.11	2.21	2.59	2.69	2.79	3.00	3.40	3.81
	min	0.94	0.94	1.14	1.50	1.55	1.65	2.06	2.16	2.11	2.31	2.69	3.05
per 1000 units ≈ kg	0.273	0.3	0.615	1.167	1.223	2.089	3.142	4.041	5.066	6.117	8.865	9.731	14.38

①, Material: Spring steel such as C60S according to DIN EN 10132-4