


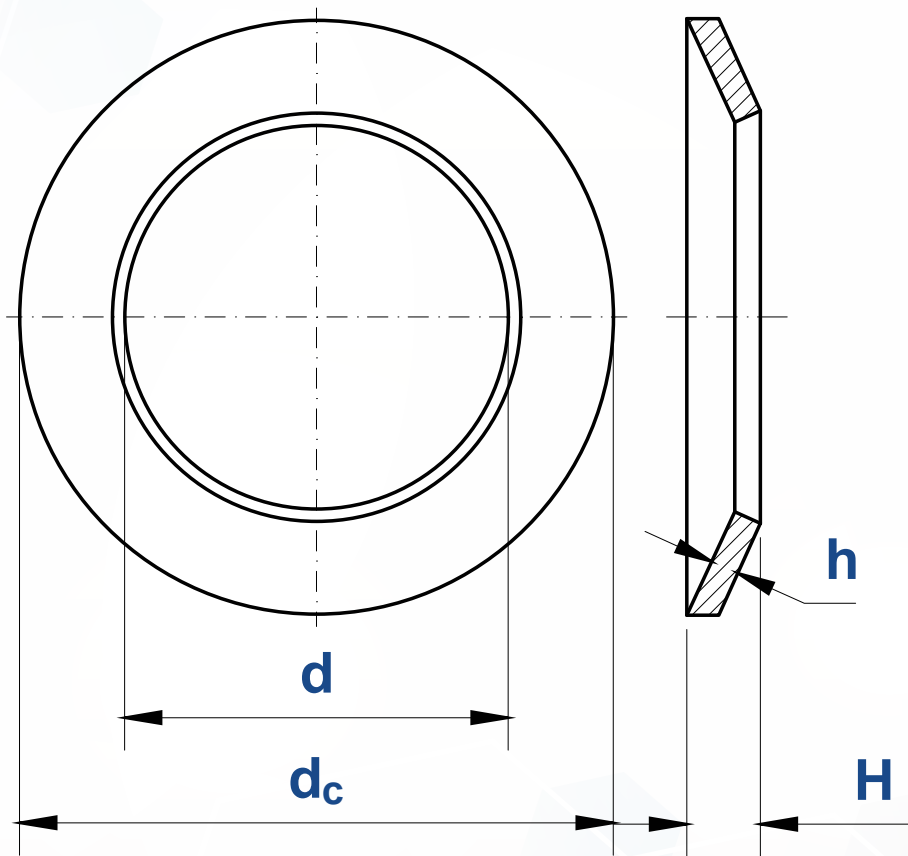

Size		M2.5	M3	M3.5	M4	M5	M6	(M7)	M8	M10	M12
d	min=nominal size	2.25	2.75	3.2	3.6	4.55	5.5	6.5	7.4	9.3	11
	max	2.35	2.85	3.32	3.72	4.67	5.62	6.65	7.55	9.45	11.18
d_c	max	6	7	8	9	11	14	17	18	23	29
	min	5.7	6.64	7.64	8.64	10.57	13.57	16.57	17.57	22.48	28.48
h ②		0.5	0.6	0.8	1	1.2	1.5	1.5	2	2.5	3
H	max	0.72	0.85	1.06	1.3	1.55	2.6	2.55	3.1	3.6	4.1
	min	0.61	0.72	0.92	1.12	1.35	2.3	2.3	2.8	3.3	3.8
per 1000 units ≈ kg		0.1	0.15	0.27	0.42	0.74	1.53	2.28	3.32	6.82	13.3

①, For the technical delivery conditions, DIN 267-26 applies.

Material: FSt = spring steel according to DIN 267-26

②, Tolerances for h according to DIN 1544