



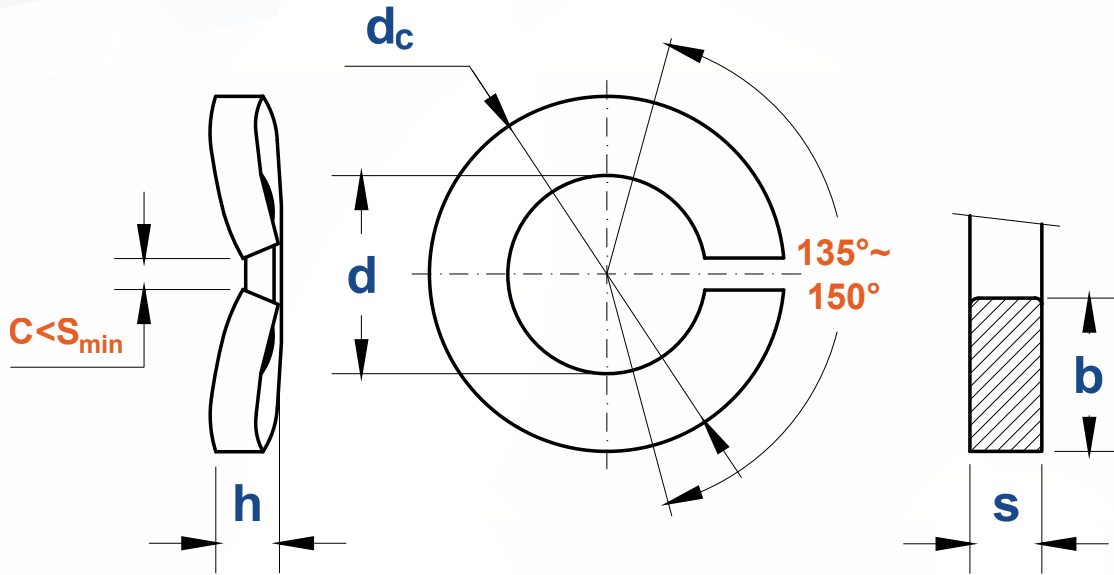

Nominal Diameter		2	2.5	3	3.5	4	5	6	7	8	10
d	min	2.1	2.6	3.1	3.6	4.1	5.1	6.1	7.1	8.1	10.2
	max	2.4	2.9	3.4	3.9	4.4	5.4	6.5	7.5	8.5	10.7
d_c	max	4.4	5.1	6.2	6.7	7.6	9.2	11.8	12.8	14.8	18.1
b	Nominal Size	0.9	1	1.3	1.3	1.5	1.8	2.5	2.5	3	3.5
	max	1	1.1	1.4	1.4	1.6	1.9	2.65	2.65	3.15	3.7
	min	0.8	0.9	1.2	1.2	1.4	1.7	2.35	2.35	2.85	3.3
s	Nominal Size	0.5	0.6	0.7	0.7	0.8	1	1.3	1.3	1.6	1.8
	max	0.6	0.7	0.8	0.8	0.9	1.1	1.4	1.4	1.7	1.9
	min	0.4	0.5	0.6	0.6	0.7	0.9	1.2	1.2	1.5	1.7
h	min	0.7	0.9	1.1	1.1	1.2	1.5	2	2	2.45	2.85
	max	0.9	1.1	1.3	1.3	1.4	1.7	2.2	2.2	2.75	3.15
per 1000 units ≈ kg		0.035	0.055	0.09	0.1	0.15	0.3	0.7	0.75	1.3	2.1

①, Material:

DIN 267-26: Spring washer should be made using spring steel (FST), manufacturing compliant DIN 17 221 or DIN 17 222; Spring washer hardness HV430-530

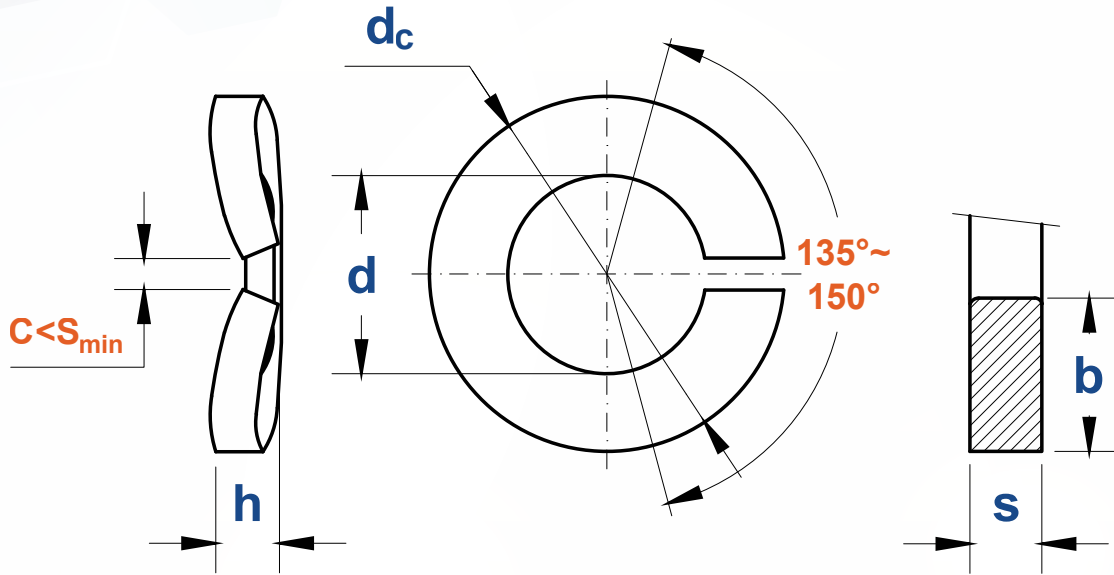

Nominal Diameter		12	14	16	18	20	22	24	27	30	36
d	min	12.2	14.2	16.2	18.2	20.2	22.5	24.5	27.5	30.5	36.5
	max	12.7	14.7	17	19	21.2	23.5	25.5	28.5	31.7	37.7
d_c	max	21.1	24.1	27.4	29.4	33.6	35.9	40	43	48.2	58.2
b	Nominal Size	4	4.5	5	5	6	6	7	7	8	10
	max	4.2	4.7	5.2	5.2	6.2	6.2	7.25	7.25	8.25	10.25
	min	3.8	4.3	4.8	4.8	5.8	5.8	6.75	6.75	7.75	9.75
s	Nominal Size	2.1	2.4	2.8	2.8	3.2	3.2	4	4	6	6
	max	2.25	2.55	2.95	2.95	3.4	3.4	4.2	4.2	6.2	6.2
	min	1.95	2.25	2.65	2.65	3	3	3.8	3.8	5.8	5.8
h	min	3.35	3.9	4.5	4.5	5.1	5.1	6.5	6.5	9.5	10.3
	max	3.65	4.3	5.1	5.1	5.9	5.9	7.5	7.5	10.5	11.3
per 1000 units ≈ kg		3.2	4.8	7	7.8	12.2	13.3	21.5	23.7	42.5	68

①, Material:

DIN 267-26: Spring washer should be made using spring steel (FST), manufacturing compliant DIN 17 221 or DIN 17 222; Spring washer hardness HV430-530