


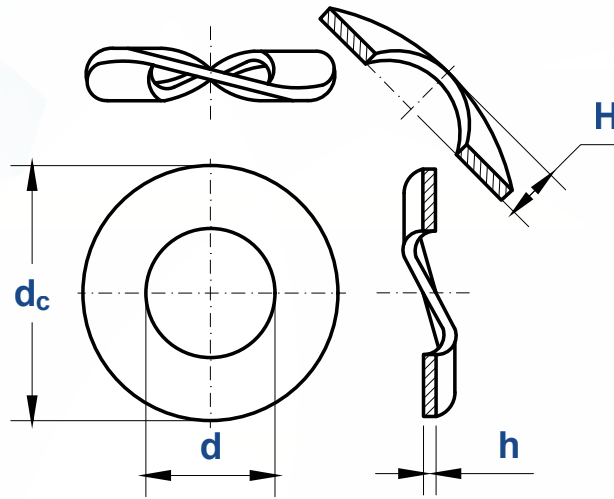

Nominal Diameter		3	3.5	4	5	6	7	8	10	12	14	
d	min	3.2	3.7	4.3	5.3	6.4	7.4	8.4	10.5	13	15	
	max	3.5	4	4.6	5.6	6.76	7.76	8.76	10.93	13.43	15.43	
d _c	Nominal Size	8	8	9	11	12	14	15	21	24	28	
	max	8.45	8.45	9.45	11.55	12.55	14.55	15.55	21.65	24.65	28.65	
	min	7.55	7.55	8.55	10.45	11.45	13.45	14.45	20.35	23.35	27.35	
h	Nominal Size	0.5	0.5	0.5	0.5	0.5	0.8	0.8	1	1.2	1.6	
	max	0.55	0.55	0.55	0.55	0.55	0.86	0.86	1.07	1.27	1.68	
	min	0.45	0.45	0.45	0.45	0.45	0.74	0.74	0.93	1.13	1.52	
H	max	1.6	1.8	2	2.2	2.6	3	3	4.2	5	6	
	min	0.8	0.9	1	1.1	1.3	1.5	1.5	2.1	2.5	3	
per 1000 units ≈ kg		≈	0.166	0.154	0.193	0.286	0.318	0.7	0.762	2.04	3.01	5.51

Nominal Diameter		16	18	20	22	24	27	30	33	36
d	min	17	19	21	23	25	28	31	34	37
	max	17.43	19.52	21.52	23.52	25.52	28.52	31.62	34.62	37.62
d _c	Nominal Size	30	34	36	40	44	50	56	60	68
	max	30.65	34.8	36.8	40.8	44.8	50.8	56.95	60.95	68.95
	min	29.35	33.2	35.2	39.2	43.2	49.2	55.05	59.05	67.05
h	Nominal Size	1.6	1.6	1.6	1.8	1.8	2	2.2	2.2	2.5
	max	1.68	1.68	1.68	1.9	1.9	2.1	2.3	2.3	2.65
	min	1.52	1.52	1.52	1.7	1.7	1.9	2.1	2.1	2.35
H	max	6.4	6.6	7.4	7.8	8.2	9.4	10	10.6	11.6
	min	3.2	3.3	3.7	3.9	4.1	4.7	5	5.3	5.8
per 1000 units ≈ kg	≈	6.03	7.84	8.43	11.9	14.5	21.1	29.5	33.1	50.2

①. Material:

FST = spring steel according to DIN 267 part 26

DIN 267-26: Spring washer should be made using spring steel (FST), manufacturing compliant DIN 17 221 or DIN 17 222; Spring washer hardness HV430-530