


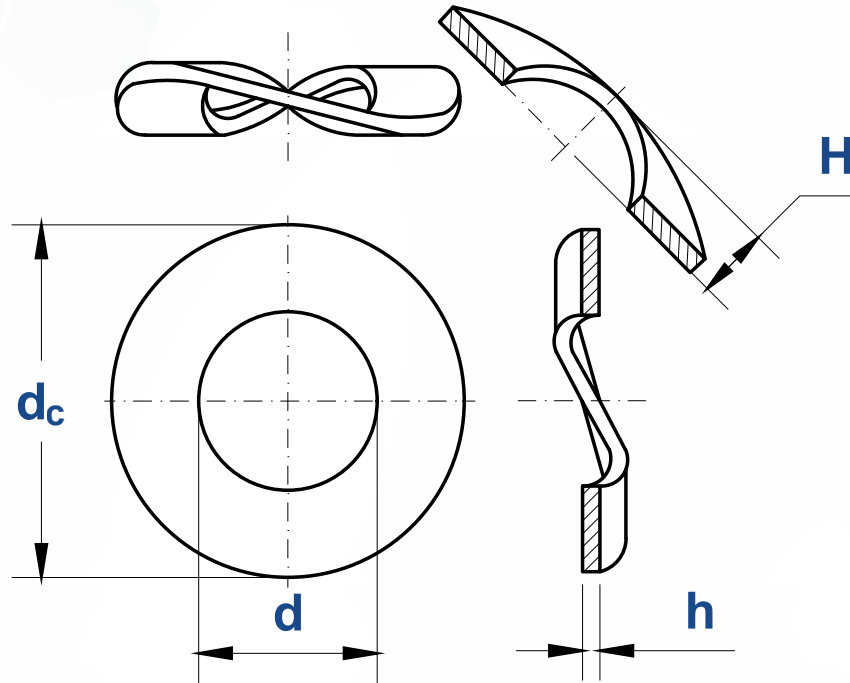

For thread diameter ^④		M2.5 ^{① ②}	M3 ^①	M3.5 ^①	M4	M5	M6	M8	M10
d ^③	min=nominal size	2.25	2.7	3.2	3.6	4.55	5.4	7.3	9.2
	max	2.35	2.8	3.32	3.72	4.67	5.52	7.45	9.35
d_c	max=nominal size	7	8	8	9	11	12	15	21
	min	6.78	7.78	7.78	8.78	10.73	11.73	14.73	20.67
h	Nominal Size	0.5	0.5	0.5	0.8	0.8	0.8	1	1
	max	0.55	0.55	0.55	0.86	0.86	0.86	1.07	1.07
	min	0.45	0.45	0.45	0.74	0.74	0.74	0.93	0.93
H	max	1.05	1.05	1.15	1.65	1.75	2	2.4	2.6
	min	0.9	0.9	1	1.5	1.6	1.85	2.2	2.4
per 1000 units ≈ kg		0.13	0.17	0.16	0.34	0.49	0.57	1.06	2.20

①, For this size, no specifications have been made for the residual spring force in DIN 267 part 26.

②, For this size, no specifications have been made for the permanent set in DIN 267 part 26.

③, The tolerances specified apply to the washer in the flat-pressed condition.

④, As specified in DIN 267-26

⑤, Technical delivery conditions:

Washers shall be made of spring steel (FSt) and comply with the technical delivery conditions specified in DIN 267-26.