


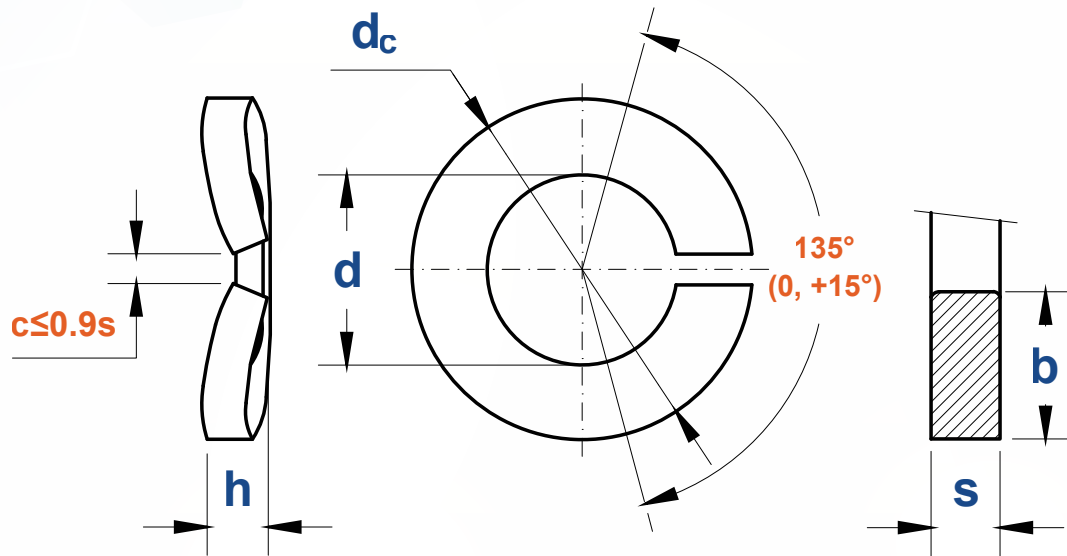

For thread diameter ^②		M2.5	M3	M3.5	M4	M5	M6	(M7) ^③	M8	M10	M12 ^①
d	min=nominal size	2.25	2.7	3.2	3.6	4.55	5.5	6.5	7.4	9.3	11
	max	2.35	2.8	3.3	3.75	4.75	5.7	6.7	7.65	9.55	11.3
b	Nominal Size	1	1.3	1.3	1.5	1.8	2.5	2.5	3	3.5	4
	max	1.1	1.4	1.4	1.6	1.9	2.65	2.65	3.15	3.7	4.2
	min	0.9	1.2	1.2	1.4	1.7	2.35	2.35	2.85	3.3	3.8
s	Nominal Size	0.6	0.7	0.7	0.8	1	1.3	1.3	1.6	1.8	2.1
	max	0.7	0.8	0.8	0.9	1.1	1.4	1.4	1.7	1.9	2.25
	min	0.5	0.6	0.6	0.7	0.9	1.2	1.2	1.5	1.7	1.95
h	max	1.1	1.3	1.3	1.4	1.7	2.2	2.2	2.75	3.15	3.65
	min	0.9	1.1	1.1	1.2	1.5	2	2	2.45	2.85	3.35
d_c	max	4.55	5.6	6.1	6.95	8.55	11	12	13.95	16.95	19.7
per 1000 units ≈ kg		0.06	0.09	0.1	0.15	0.3	0.64	0.72	1.23	2	3.1

①, For this size, no specifications have been made for the residual spring force in DIN 267 Part 26.

②, As specified in DIN 267 Part 26.

③, For replacement and maintenance purposes.

④, Technical delivery conditions:

Washers shall be made of spring steel (FSt) and comply with the technical delivery conditions specified in DIN 267-26.