


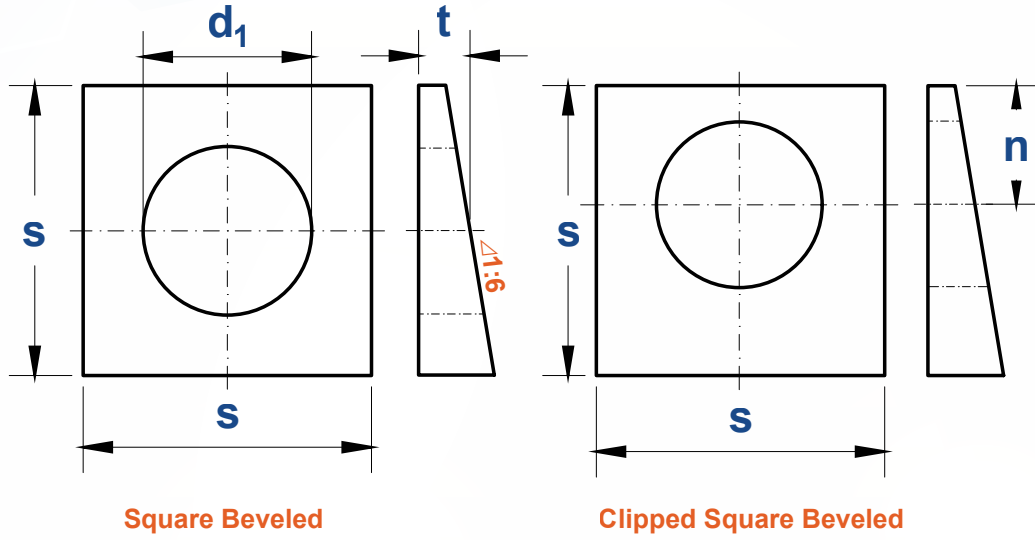

Size		1/2	5/8	3/4	7/8	1	1-1/8	1-1/4	1-3/8	1-1/2
d_1	min	0.531	0.688	0.813	0.938	1.125	1.25	1.375	1.5	1.625
	max	0.5623	0.7193	0.8443	0.9693	1.1563	1.2813	1.4063	1.5313	1.6563
s		1.75	1.75	1.75	1.75	1.75	2.25	2.25	2.25	2.25
t		0.313	0.313	0.313	0.313	0.313	0.313	0.313	0.313	0.313
n		0.438	0.547	0.656	0.766	0.875	0.984	1.094	1.203	1.313

①, Materials and properties shall conform to the requirements established by ASTM F 436.