


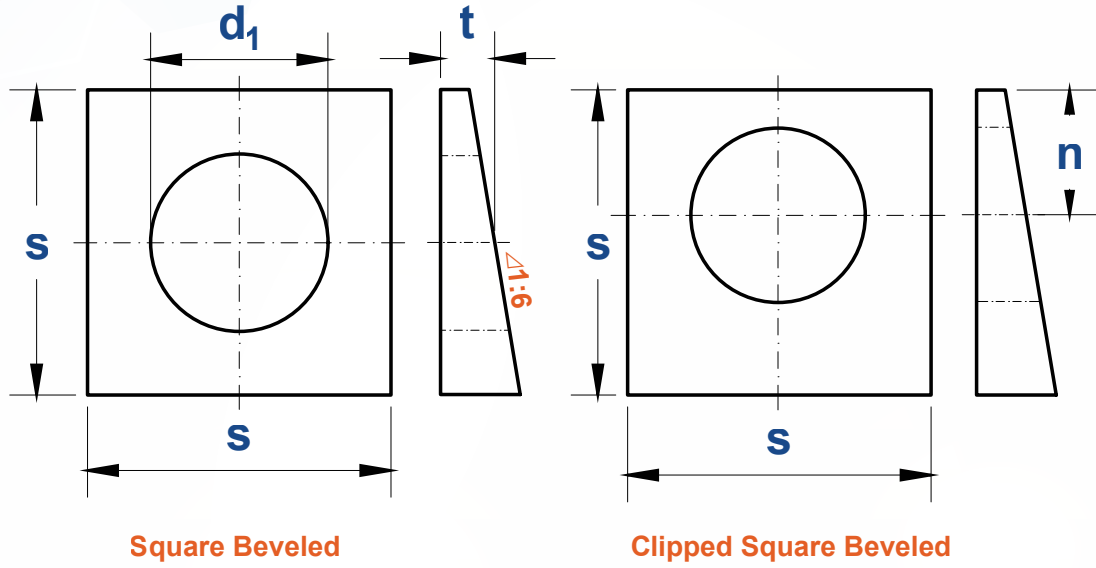

Size		1/2	5/8	3/4	7/8	1	1-1/8	1-1/4	1-3/8	1-1/2
d₁	min	0.531	0.688	0.813	0.938	1.125	1.25	1.375	1.5	1.625
	max	0.563	0.72	0.845	0.97	1.188	1.313	1.438	1.563	1.688
s	min	1.75	1.75	1.75	1.75	1.75	2.25	2.25	2.25	2.25
t	Ref	0.313	0.313	0.313	0.313	0.313	0.313	0.313	0.313	0.313
n	min	0.438	0.547	0.656	0.766	0.875	0.984	1.094	1.203	1.313

①. Materials and properties shall conform to the requirements established by ASTM F 436.