



Type VI

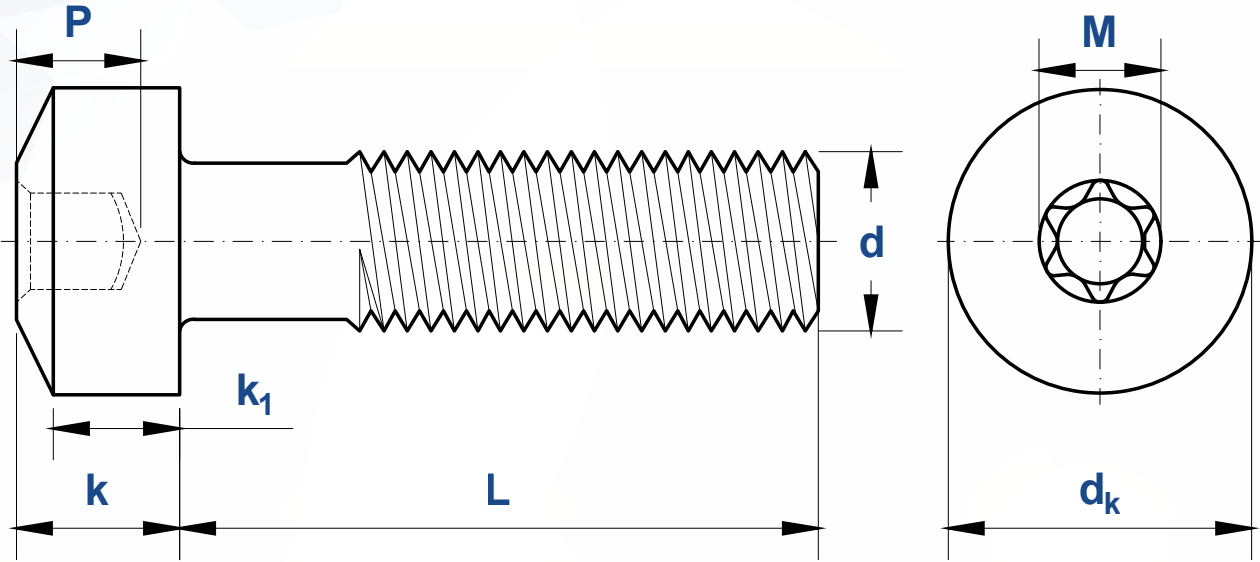

Thread Size d		2#	3#	4#	5#	6#	8#	10#	12#
d	Nominal Size	0.0860	0.0990	0.1120	0.1250	0.1380	0.1640	0.1900	0.2160
PP		56	48	40	40	32	32	24	24
Socket No.		T6	T8	T10	T10	T15	T20	T25	T27
M	Ref.	0.069	0.094	0.101	0.111	0.132	0.155	0.178	0.200
P	max	0.030	0.040	0.040	0.055	0.055	0.071	0.090	0.090
	min	0.025	0.035	0.030	0.045	0.045	0.055	0.070	0.070
dk	max	0.140	0.161	0.183	0.205	0.226	0.270	0.313	0.357
	min	0.124	0.145	0.166	0.187	0.208	0.250	0.292	0.334
k1	max	0.062	0.070	0.079	0.088	0.096	0.113	0.130	0.148
	min	0.053	0.061	0.069	0.078	0.086	0.102	0.118	0.134
k	max	0.083	0.095	0.107	0.120	0.132	0.156	0.180	0.205
	min	0.066	0.077	0.088	0.100	0.111	0.133	0.156	0.178

①, Where specifying nominal size in decimals, zeros preceding the decimal and in the fourth decimal place shall be omitted.

Type VI

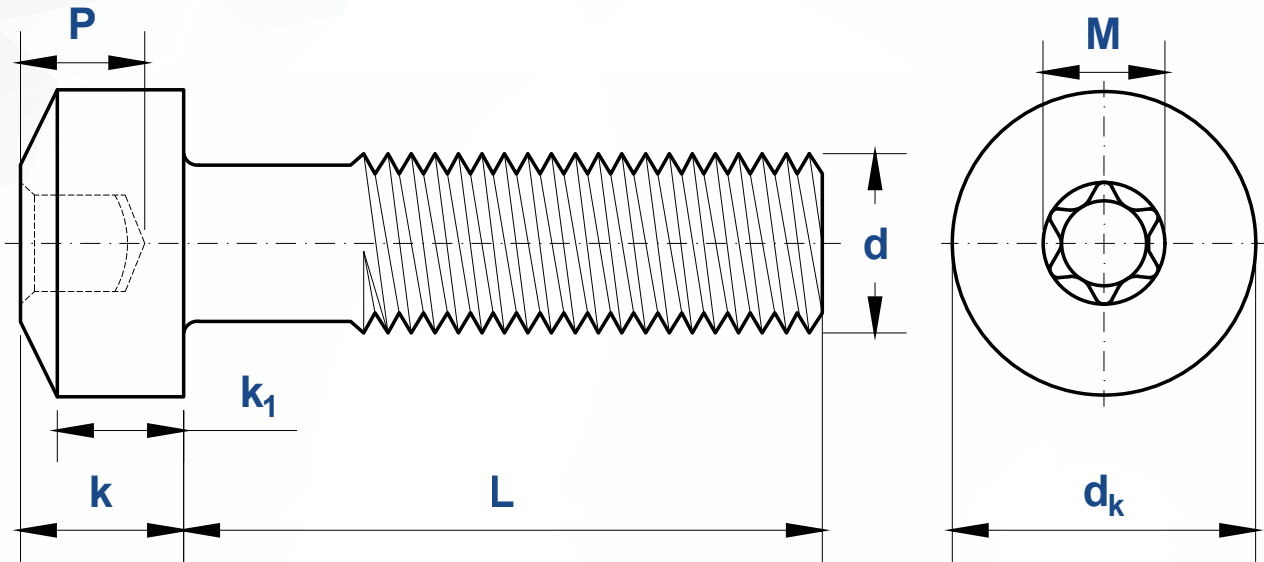

Thread Size d		1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4
d	Nominal Size	0.2500	0.3125	0.3750	0.4375	0.5000	0.5625	0.6250	0.7500
PP		20	18	16	14	13	12	11	10
Socket No.		T30	T40	T45	T50	T55	T55	T60	T70
M	Ref.	0.221	0.266	0.312	0.352	0.446	0.446	0.529	0.619
P	max	0.120	0.125	0.155	0.169	0.190	0.190	0.230	0.295
	min	0.100	0.105	0.135	0.149	0.170	0.170	0.210	0.275
dk	max	0.414	0.518	0.622	0.625	0.750	0.812	0.875	1.000
	min	0.389	0.490	0.590	0.589	0.710	0.768	0.827	0.945
k1	max	0.170	0.211	0.253	0.265	0.297	0.336	0.375	0.441
	min	0.155	0.194	0.233	0.242	0.273	0.308	0.345	0.406
k	max	0.237	0.295	0.355	0.368	0.412	0.466	0.521	0.612
	min	0.207	0.262	0.315	0.321	0.362	0.410	0.461	0.542

①, Where specifying nominal size in decimals, zeros preceding the decimal and in the fourth decimal place shall be omitted.