


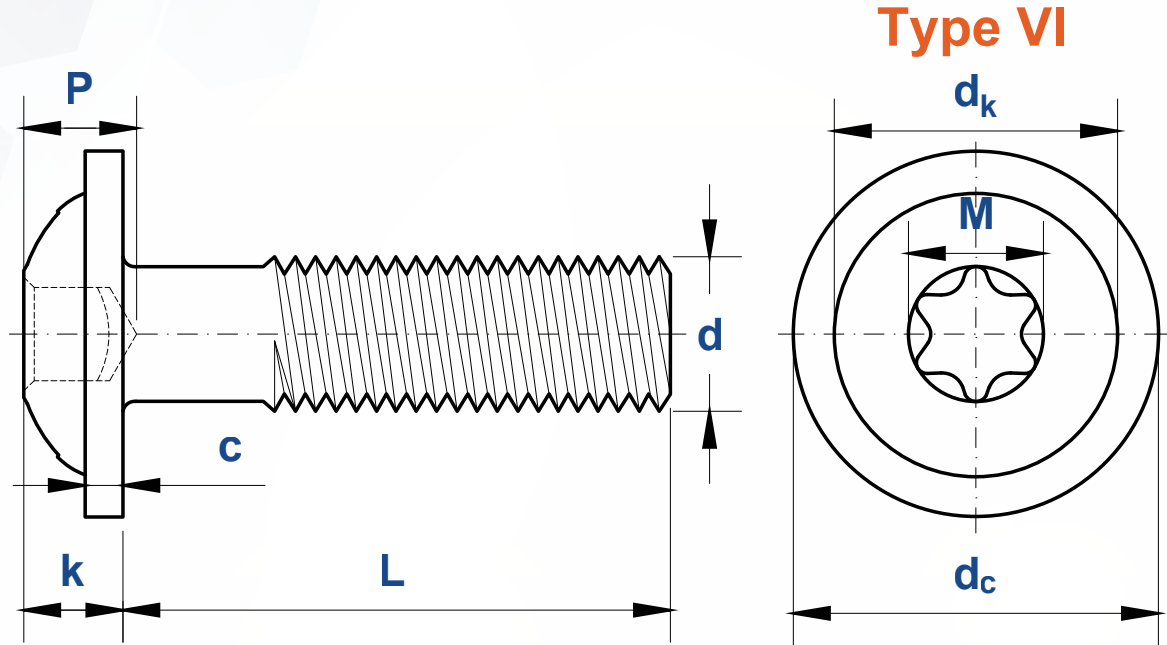

Thread Size d		2#	3#	4#	5#	6#	8#	10#	12#	1/4	5/16	3/8	7/16	1/2
d	Nominal Size	0.0860	0.0990	0.1120	0.1250	0.1380	0.1640	0.1900	0.2160	0.2500	0.3125	0.3750	0.4375	0.5000
PP		56	48	40	40	32	32	24	24	20	18	16	14	13
M	Ref.	0.081	0.094	0.111	0.111	0.132	0.155	0.178	0.200	0.221	0.266	0.312	0.352	0.446
Socket No.		T7	T8	T9	T10	T15	T20	T25	T27	T30	T40	T45	T50	T55
P	max	0.035	0.035	0.040	0.045	0.060	0.065	0.075	0.080	0.090	0.120	0.130	0.150	0.170
	min	0.030	0.030	0.035	0.035	0.050	0.050	0.060	0.065	0.075	0.105	0.115	0.135	0.155
dk	Ref.	0.136	0.156	0.177	0.198	0.218	0.259	0.300	0.341	0.396	0.494	0.593	0.691	0.790
dc	max	0.202	0.232	0.261	0.291	0.321	0.380	0.439	0.498	0.576	0.719	0.861	1.004	1.146
	min	0.186	0.215	0.243	0.272	0.301	0.358	0.416	0.473	0.548	0.687	0.825	0.963	1.101
k	max	0.062	0.070	0.079	0.088	0.096	0.113	0.130	0.148	0.170	0.211	0.253	0.294	0.335
	min	0.050	0.058	0.067	0.075	0.084	0.101	0.118	0.134	0.157	0.197	0.238	0.278	0.319
c	Ref.	0.030	0.030	0.030	0.040	0.040	0.040	0.050	0.050	0.050	0.060	0.060	0.070	0.090

①, Where specifying nominal size in decimals, zeros preceding the decimal and in the fourth decimal place shall be omitted.